

Данни за артикула: NLKWIDT03S

Евакуационен осветител KWI Autotest LED 3h 230V AC TT

With 2x 3,2/3,3Ah LiFePO₄ batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, 1h: 300lm; 3h: 300lm; 8h: 120lm




Технически данни

Нето дължина (mm)	390,00
Нето ширина (mm)	93,00
Нето височина (mm)	139,00
Нето тегло (kg)	1,30
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	SelfControl Low Temperature
Версия	пластмасов осветител
Дизайн	KWI
Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9003 (white)

Технически данни - продължение

Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Визуален обхват (m)	16
Осветеност	LED (3W)
Лумен	1h: 300;3h: 300;8h: 120
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,70
Power non-maintained mode (W)	2
Power max. (W)	6,90
Батерия (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
Степен на защита - IP	IP65
Impact Resistance	IK06
Монтаж	surface mounting ceiling
Мин. околна температура (°C)	-15
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

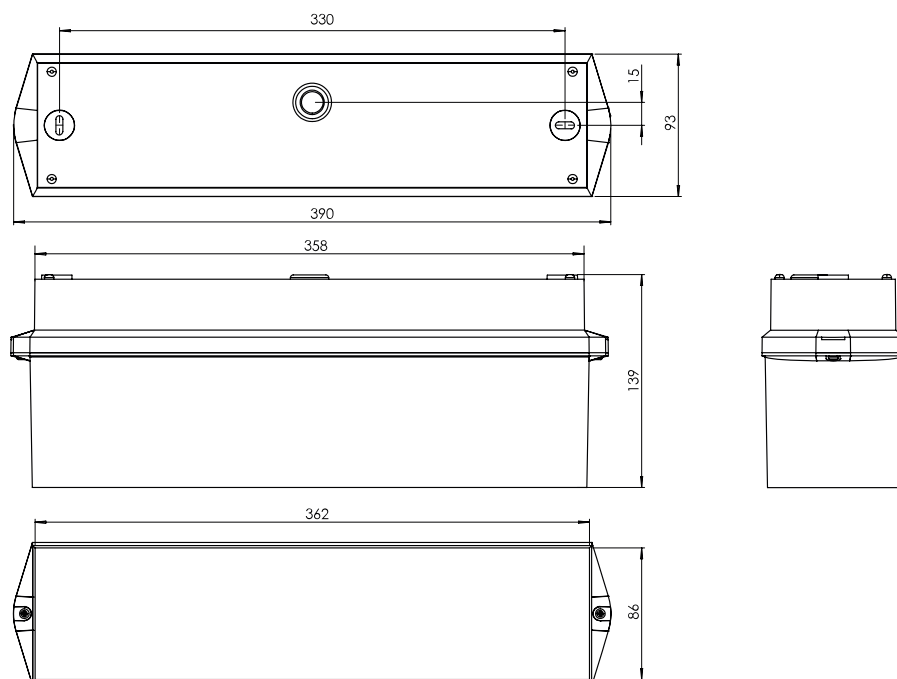

**Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx -
Maintenance factor 0.80 - Autonomy time 1h/3h**

					
2,00	3,51	9,16	8,09	7,02	2,74
2,50	3,64	9,71	8,62	7,52	2,84
3,00	3,67	10,1	8,98	7,85	2,86
3,50	3,62	10,34	9,2	8,05	2,79
4,00	3,46	10,44	9,29	8,11	2,61
5,00	2,73	10,27	9,08	7,86	1,85

**Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx -
Maintenance factor 0.80 - Autonomy time 8h**

					
2,00	1,88	5,55	5	4,37	1,48
2,50	1,6	5,55	4,99	4,34	1,2

Таблица с артикули

Описание	Артикулен No.
Евакуационен осветител KWI Autotest LED 3h 230V AC TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, 1h: 300lm; 3h: 300lm; 8h: 120lm	NLKWIDT03S
Акcesoари	
Сферична защитна кошница за KW	NLBKW
Комплект пиктограми за NLKWI.. ляво, дясно, нагоре, надолу	NLKWIPIKTO
Пендел к-т 500mm бял кабел	NL2PW
скоби за монтаж на стена,бяло за серии:KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Батерия LiFePO4 3.2V 3.3Ah за LED осв., KM,KSC,KMB,ASM,ZAW	NLAKKU323T
LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV