


Данни за артикула: NLKWIDT33S

Евакуационен осв. KWI Autotest 4x1W ERTLED 3h 230V AC TT

With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm




Технически данни

Нето дължина (mm)	390,00
Нето ширина (mm)	93,00
Нето височина (mm)	139,00
Нето тегло (kg)	0,70
Тип осветително тяло	комб. аварийни и RZ осветители авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	SelfControl Low Temperature
Версия	пластмасов осветител

Технически данни - продължение

Дизайн	KW1
Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9003 (white)
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Визуален обхват (m)	16
Осветеност	ERT-LED (4W)
Лумен	1h: 520;3h: 520;8h: 210
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,90
Power non-maintained mode (W)	2
Power max. (W)	7,30
Батерия (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
Степен на защита - IP	IP65
Impact Resistance	IK06
Монтаж	surface mounting ceiling
Мин. околна температура (°C)	-15
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

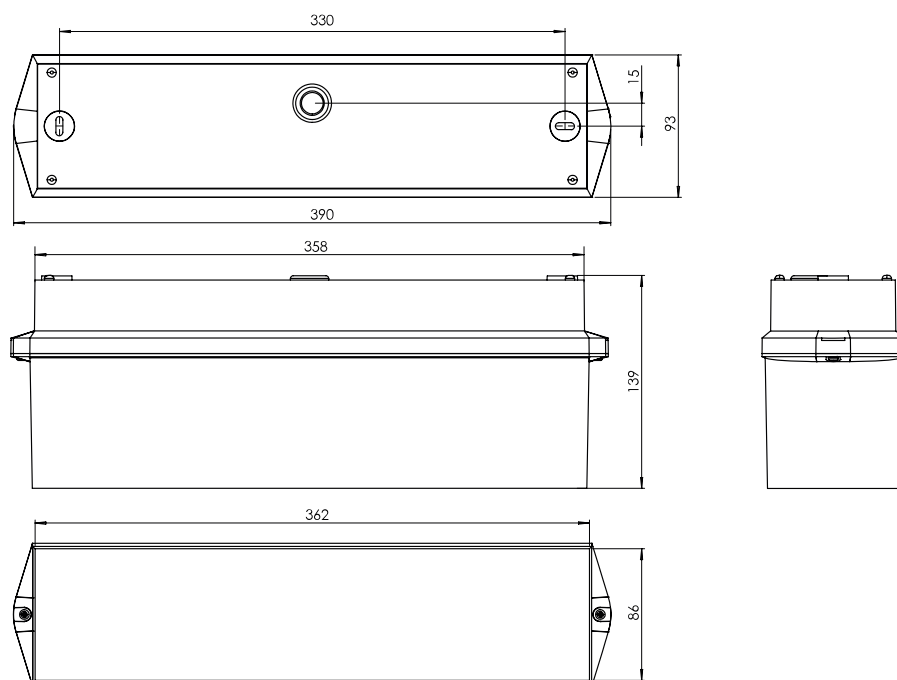

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2	3,78	9,81	8,56	7,32	2,88
2,5	3,94	10,44	9,14	7,87	3,01
3	4,01	10,89	9,57	8,26	3,06
3,5	4	11,19	9,85	8,51	3,02
4	3,9	11,38	10,01	8,64	2,9
5	3,37	11,36	9,96	8,55	2,34
6	1,65	10,85	9,41	7,96	0,57

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 8h

					
2,00	2,45	6,79	6,02	5,2	1,89
2,50	2,37	7,01	6,21	5,36	1,79
3,00	2,12	7,02	6,2	5,33	1,53
3,50	1,54	6,83	5,99	5,1	0,97

Таблица с артикули

Описание	Артикулен No.
Евакуационен осв. KWI Autotest 4x1W ERTLED 3h 230V AC TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm	NLKWIDT33S
Акcesoари	
Сферична защитна кошница за KW	NLBKW
Комплект пиктограми за NLKWI.. ляво, дясно, нагоре, надолу	NLKWIPIKTO
Пендел к-т 500mm бял кабел	NL2PW
скоби за монтаж на стена,бяло за серии:KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Батерия LiFePO4 3.2V 3.3Ah за LED осв., KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV