


Данни за артикула: NLKWIDT33W

Emergency lum. KWI Wireless 4x1 W ERTLED 3h 230V ceiling TT

With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 520lm, WirelessControl Professional type




Технически данни

Нето дължина (mm)	390,00
Нето ширина (mm)	93,00
Нето височина (mm)	139,00
Нето тегло (kg)	1,30
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Low Temperature
Версия	пластмасов осветител
Дизайн	KWI

Технически данни - продължение

Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9003 (white)
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Визуален обхват (m)	16
Време на съхранение (h)	3
Осветеност	ERT-LED (4W)
Лумен	520
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Батерия (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
Степен на защита - IP	IP65
Impact Resistance	IK06
Монтаж	surface mounting ceiling
Мин. околна температура (°C)	-15
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

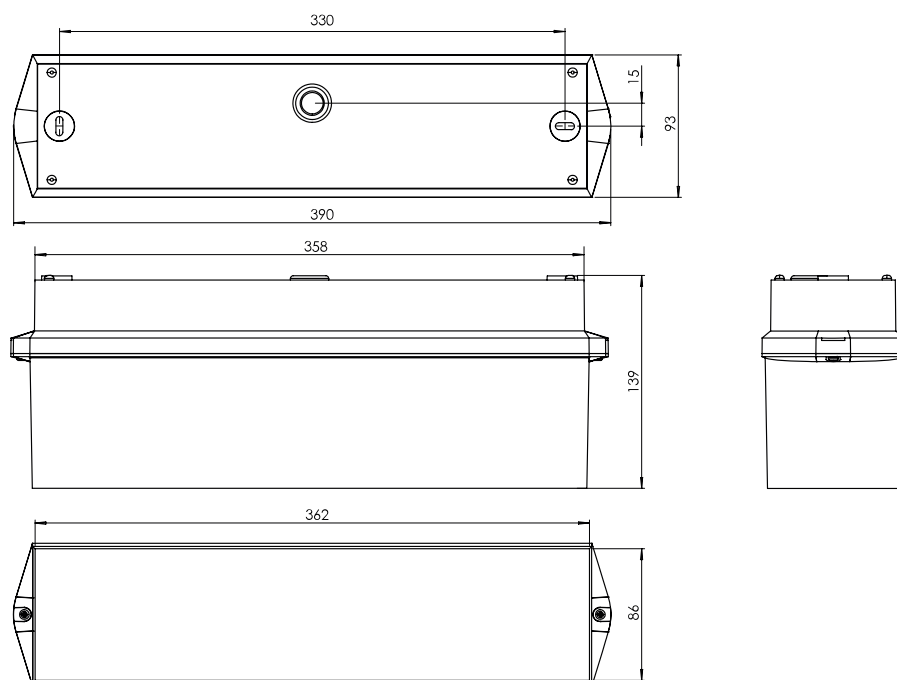

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,82	9,94	8,29	6,56	2,53
2,50	3,94	10,5	8,78	6,99	2,6
3,00	3,97	10,88	9,1	7,25	2,57
3,50	3,89	11,11	9,28	7,36	2,44
4,00	3,71	11,2	9,32	7,34	2,19
5,00	2,76	10,95	8,97	6,87	0,94

Spacing table without lenses - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	3,78	9,81	8,56	7,32	2,88
2,50	3,94	10,44	9,14	7,87	3,01
3,00	4,01	10,89	9,57	8,26	3,06
3,50	4	11,19	9,85	8,51	3,02
4,00	3,9	11,38	10,01	8,64	2,9
5,00	3,37	11,36	9,96	8,55	2,34
6,00	1,65	10,85	9,41	7,96	0,57

Таблица с артикули

Описание	Артикулен No.
Emergency lum. KWI Wireless 4x1W ERTLED 3h 230V ceiling TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, with exchangeable lenses, corridor lenses in scope of delivery included, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 520lm, WirelessControl Professional type	NLKWIDT33W
Акcesoари	
Сферична защитна кошница за KW	NLBKW
Комплект пиктограми за NLKWI.. ляво, дясно, нагоре, надолу	NLKWIPKTO
Пендел к-т 500mm бял кабел	NL2PW
скоби за монтаж на стена,бяло за серии:KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Батерия LiFePO4 3.2V 3.3Ah за LED осв., KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV