


Данни за артикула: NLKWIW039E

Евакуационен осв. KWI 4x1W ERT-LED 230V EL, за стена

with supervision - centrally switchable, wall surface mounting with pictogram on one side or ceiling surface mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 520lm



Информация за продукта

When used with pictograms, it is recommended not to use exchangeable lenses for uniform illumination. When used as an emergency luminaire, the luminaire can be operated without or with exchangeable lenses - see luminaire spacing tables in the online data sheet.




Технически данни

Нето дължина (mm)	390,00
Нето ширина (mm)	93,00
Нето височина (mm)	99,00
Нето тегло (kg)	0,70
Тип осветително тяло	комб. аварийни и RZ осветители авариен осветител
Автономност - централна бат.	Central power supply luminaire

Технически данни - продължение

Функция	with monitoring - centrally switchable
Версия	пластмасов осветител
Дизайн	KWI
Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9003 (white)
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Визуален обхват (m)	16
Осветеност	ERT-LED (4W)
Лумен	520
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1, 10
Power max. (W)	5,20
Степен на защита - IP	IP65
Impact Resistance	IK06
Монтаж	surface mounting ceiling surface mounting wall
Мин. околна температура (°C)	-20
Макс. околна температура (°C)	40
AA Class E 8101	AA3 AA4 AA5
Производител	Schrack

Dimensions (mm)

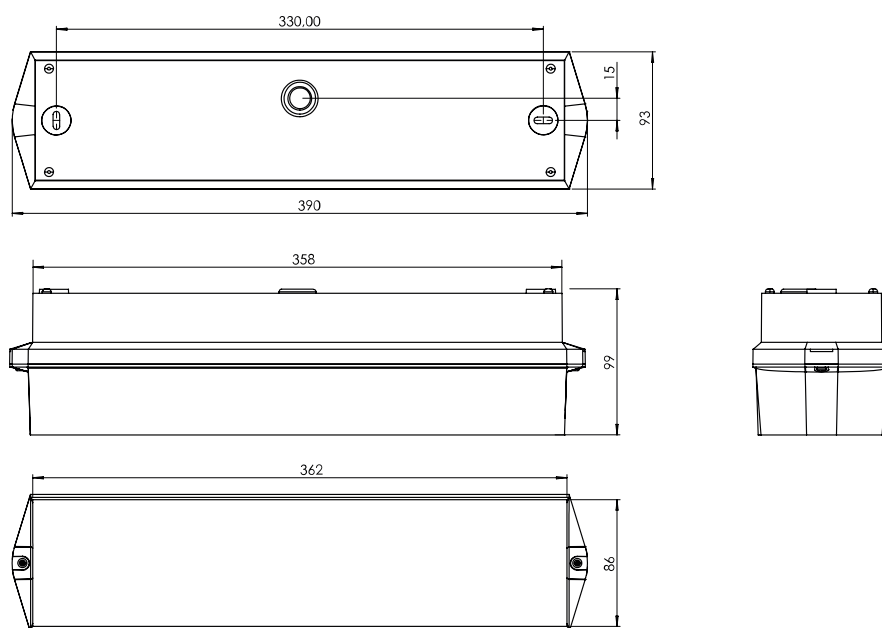

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,8	9,67	8,94	8,12	3,26
2,50	4,03	10,41	9,68	8,85	3,49
3,00	4,18	10,98	10,25	9,42	3,64
3,50	4,25	11,43	10,68	9,86	3,71
4,00	4,26	11,76	11	10,18	3,72
5,00	4,06	12,1	11,33	10,51	3,53
6,00	3,52	12,05	11,26	10,46	2,99
7,00	2,34	11,59	10,81	10,03	1,85

Таблица с артикули

Описание	Артикулен No.
Евакуационен осв. KWI 4x1W ERT-LED 230V EL, за стена with supervision - centrally switchable, wall surface mounting with pictogram on one side or ceiling surface mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 520lm	NLKWIW039E
Акcesoари	
Сферична защитна кошница за KW	NLBKW
Комплект пиктограми за NLKWI.. ляво, дясно, нагоре, надолу	NLKWIPIKTO
Пендел к-т 500mm бял кабел	NL2PW
скоби за монтаж на стена, бяло за серии: KB, KX, KW, KCD, KE, GX, RX	NLAWX001