

Данни за артикула: NLKWIWC33S

Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

1h/3h/8h adjustable, wall surface mounting with pictogram on one side or ceiling mounting without pictogram with additional illumination for escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, 1h/3h/8h adjustable, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm

Информация за продукта

When used with pictograms, it is recommended not to use exchangeable lenses for uniform illumination. When used as an emergency luminaire, the luminaire can be operated without or with exchangeable lenses - see luminaire spacing tables in the online data sheet.



Технически данни

Нето дължина (mm)	390,00
Нето ширина (mm)	93,00
Нето височина (mm)	99,00
Нето тегло (kg)	1,37
Тип осветително тяло	комб. аварийни и RZ осветители авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	self controlled cool version
Версия	пластмасов осветител
Дизайн	KWI
Безхалогенен	Housing made of halogen-free plastic
Цвят	Бяло
Визуален обхват (m)	16
Време на съхранение (h)	3
Illuminant	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
MPP диапазон на напрежение (V)	230V AC 50Hz ±20%
Батерия (V/Ah)	9,6/2,0 NiMh
Степен на защита - IP	IP65
Монтаж	surface mounting ceiling surface mounting wall
Мин. околна температура (°C)	-30
Макс. околна температура (°C)	40

Технически данни - продължение

AA Class E 8101

AA3


AA4

AA5


Производител

Schrack

Dimensions (mm)

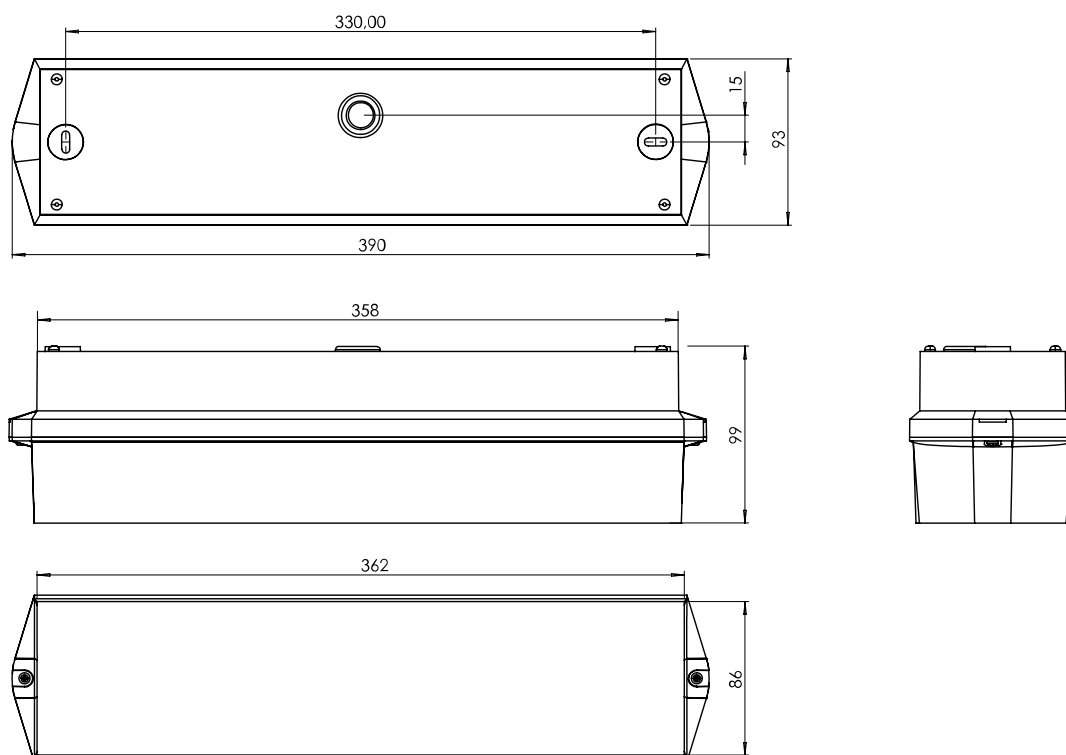

Housing IP54 for COOL version (mm)

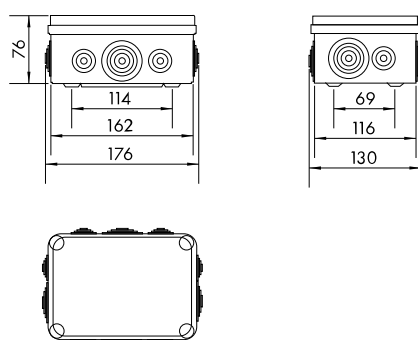

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

Montagehöhe [m]					
2,00	2,52	6,89	6,02	5,20	1,89
2,50	2,44	7,10	6,21	5,36	1,79
3,00	2,20	7,11	6,20	5,33	1,53
3,50	1,68	6,93	5,99	5,10	0,97

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Таблица с артикули

Описание	Артикулен No.
Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC 1h/3h/8h adjustable, wall surface mounting with pictogram on one side or ceiling mounting without pictogram with additional illumination for escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) NLKWIWC33S to be mounted outside the cold area, 1h/3h/8h adjustable, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm	
Акcesoари	
Сферична защитна кошница за KW	NLBKW
Комплект пиктограми за NLKWI.. ляво, дясно, нагоре, надолу	NLKWIPIKTO
Пендел к-т 500mm бял кабел	NL2PW
скоби за монтаж на стена,бяло за серии:KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Акумулатор 9,6V 2,0 Ah за осветители ERT-LED 1h,3h,8h Suitable for LPU module	NLAKKU9620