


Данни за артикула: NLKWIWT33S

Евакуационен осв. KWI Autotest 4x1W ERTLED 3h 230V AC TT

With 2x 3,2/3,3Ah LiFePO₄ batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, wall surface mounting with pictogram on one side or ceiling mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm




Технически данни

Нето дължина (mm)	390,00
Нето ширина (mm)	93,00
Нето височина (mm)	99,00
Нето тегло (kg)	0,70
Тип осветително тяло	комб. аварийни и RZ осветители авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	SelfControl Low Temperature
Версия	пластмасов осветител
Дизайн	KWI
Безхалогенен	Housing made of halogen-free plastic

Технически данни - продължение

Цвят	RAL 9003 (white)
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Визуален обхват (m)	16
Осветеност	ERT-LED (4W)
Лумен	1h: 520;3h: 520;8h: 210
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,90
Power non-maintained mode (W)	2
Power max. (W)	7,30
Батерия (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
Степен на защита - IP	IP65
Impact Resistance	IK06
Монтаж	surface mounting ceiling surface mounting wall
Мин. околна температура (°C)	-15
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

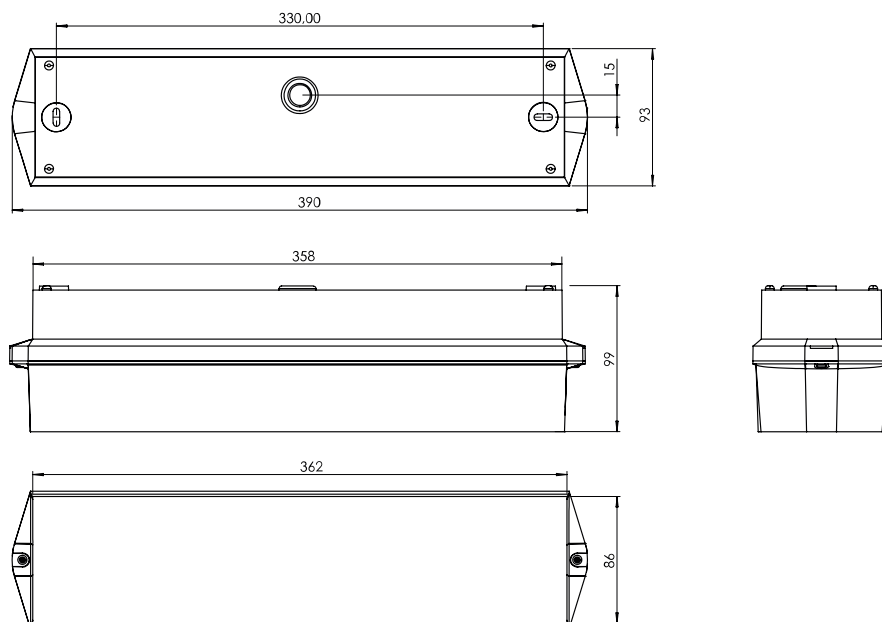

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 8h

					
2,00	2,64	7,02	6,57	6,07	2,32
2,50	2,68	7,4	6,94	6,44	2,35
3,00	2,6	7,61	7,14	6,64	2,28
3,50	2,4	7,65	7,18	6,69	2,08
4,00	2,03	7,55	7,07	6,59	1,72

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2,00	3,26	8,4	7,82	7,17	2,84
2,50	3,41	8,99	8,4	7,75	2,99
3,00	3,48	9,41	8,82	8,17	3,06
3,50	3,46	9,7	9,1	8,46	3,04
4,00	3,36	9,87	9,26	8,62	2,95
5,00	2,85	9,84	9,23	8,61	2,45
6,00	1,47	9,33	8,73	8,14	1,18

Таблица с артикули

Описание	Артикулен No.
Евакуационен осв. KWI Autotest 4x1W ERTLED 3h 230V AC TT With 2x 3,2/3,3Ah LiFePO4 batteries suitable for low temperatures, -15°C up to 40°C, 1h/3h/8h adjustable, wall surface mounting with pictogram on one side or ceiling mounting without pictogram with additional illumination for escape routes, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 210lm	NLKWIWT33S
Акcesoари	
Сферична защитна кошница за KW	NLBKW
Комплект пиктограми за NLKWI.. ляво, дясно, нагоре, надолу	NLKWIPIKTO
Пендел к-т 500mm бял кабел	NL2PW
скоби за монтаж на стена,бяло за серии:KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Батерия LiFePO4 3.2V 3.3Ah за LED осв., KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV