

Данни за артикула: NLPMDT03SC

Евакуационен осветител PM selfcontrol LED 3h 230V AC TT

1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class II, LiFePO₄ battery suitable for low temperatures -15° to 40°C



Технически данни

Нето дължина (mm)	236,00
Нето ширина (mm)	136,00
Нето височина (mm)	168,00
Нето тегло (kg)	1,30
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	SelfControl Low Temperature
Версия	пластмасов осветител
Дизайн	PM
Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9003 (white)

Технически данни - продължение

Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Визуален обхват (m)	20
Осветеност	LED (3W)
MPP диапазон на напрежение (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	2
Power max. (W)	6,90
Батерия (V/Ah)	2x 3,2V/3,3Ah LiFePO4-TT
Степен на защита - IP	IP65
Impact Resistance	≥ IK03
Монтаж	surface mounting ceiling
Мин. околна температура (°C)	-15
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

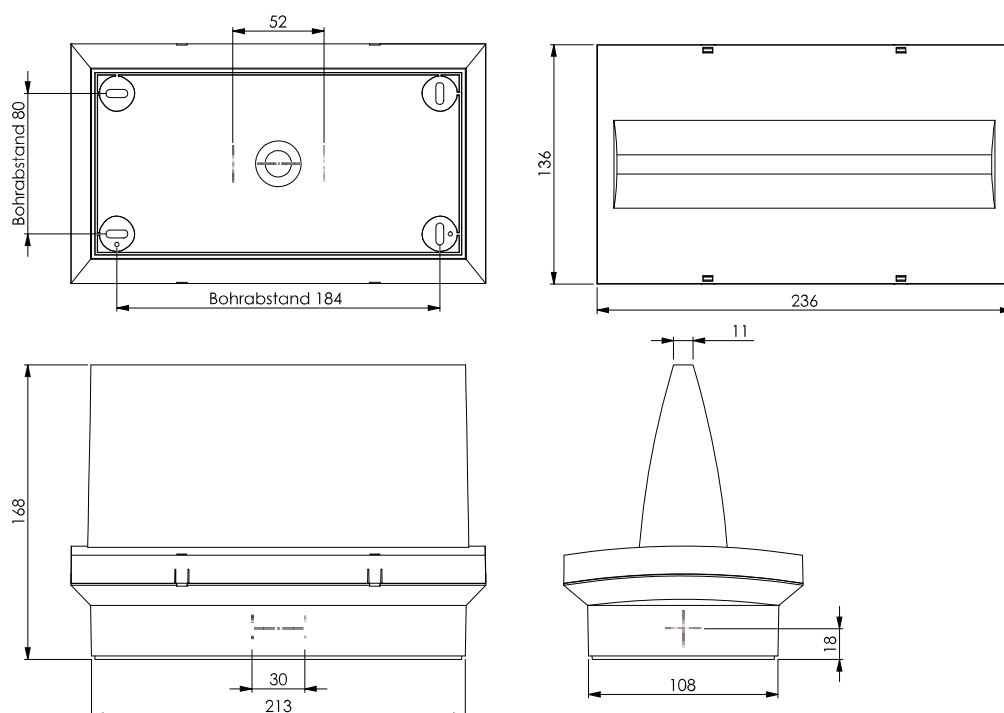


Таблица с артикули

Описание	Артикулен No.
Евакуационен осветител PM selfcontrol LED 3h 230V AC TT 1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class NLPMDT03SC II, LiFePO4 battery suitable for low temperatures -15° to 40°C	
Акcesoари	
Рамка за вграждане, бяла, за евакуационни осв. Design PM Required ceiling cut out: 246 x 152 mm	NLPME
Батерия LiFePO4 3.2V 3.3Ah за LED осв., KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV