

Данни за артикула: NLPMW433SC

## Евакуационен осв. PM Autotest LED 3h 230V AC wall mounting

Safety luminaire with exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, IP65, protection class II, LiFePO4 battery, 1h:500lm, 3h:500lm, 8h: 200lm




### Технически данни

|                              |                                      |
|------------------------------|--------------------------------------|
| Нето дължина (mm)            | 236,00                               |
| Нето ширина (mm)             | 136,00                               |
| Нето височина (mm)           | 65,00                                |
| Нето тегло (kg)              | 1,30                                 |
| Тип осветително тяло         | авариен осветител                    |
| Автономност - централна бат. | Self contained luminaire             |
| Функция                      | саморегулиращ се                     |
| Версия                       | пластмасов осветител                 |
| Дизайн                       | PM                                   |
| Безхалогенен                 | Housing made of halogen-free plastic |
| Цвят                         | RAL 9003 (white)                     |

## Технически данни - продължение

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Pictogram                      | Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010 |
| Визуален обхват (m)            | 20                                                                                                                              |
| Осветеност                     | LED (3W)                                                                                                                        |
| Лумен                          | 1h: 520;3h: 520                                                                                                                 |
| MPP диапазон на напрежение (V) | 230V AC 50Hz ±20%                                                                                                               |
| Power maintained mode (W)      | 7                                                                                                                               |
| Power non-maintained mode (W)  | 2                                                                                                                               |
| Power max. (W)                 | 8,20                                                                                                                            |
| Батерия (V/Ah)                 | 2x 3,2V/3,3Ah LiFePO4                                                                                                           |
| Степен на защита - IP          | IP65                                                                                                                            |
| Impact Resistance              | IK06                                                                                                                            |
| Монтаж                         | surface mounting wall                                                                                                           |
| Мин. околна температура (°C)   | -5                                                                                                                              |
| Макс. околна температура (°C)  | 40                                                                                                                              |
| AA Class E 8101                | AA4                                                                                                                             |
| Производител                   | Schrack                                                                                                                         |

## Dimensions (mm)

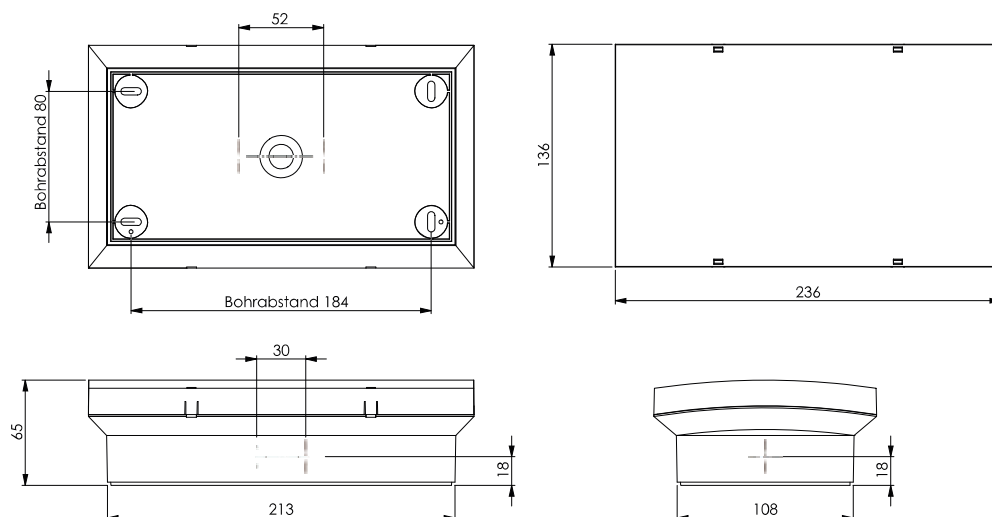

**Spacing table with corridor lenses (included in scope delivery) - Min.  
illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80**

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2,00                                                                              | 6,78                                                                              | 15,5                                                                              | 12                                                                                | 8,49                                                                                | 3,32                                                                                |
| 2,50                                                                              | 7,86                                                                              | 17,94                                                                             | 13,55                                                                             | 9,12                                                                                | 3,52                                                                                |
| 3,00                                                                              | 8,82                                                                              | 20,27                                                                             | 15,02                                                                             | 9,61                                                                                | 3,65                                                                                |
| 3,50                                                                              | 9,69                                                                              | 22,41                                                                             | 16,23                                                                             | 9,99                                                                                | 3,72                                                                                |
| 4,00                                                                              | 10,21                                                                             | 24,37                                                                             | 17,32                                                                             | 10,27                                                                               | 3,77                                                                                |
| 5,00                                                                              | 11                                                                                | 27,91                                                                             | 19,11                                                                             | 10,61                                                                               | 3,84                                                                                |
| 6,00                                                                              | 7,52                                                                              | 29,99                                                                             | 19,2                                                                              | 10,81                                                                               | 3,75                                                                                |
| 7,00                                                                              | 5,33                                                                              | 28,36                                                                             | 16,18                                                                             | 10,91                                                                               | 3,42                                                                                |
| 8,00                                                                              | 2,62                                                                              | 27,07                                                                             | 13,89                                                                             | 10,83                                                                               | 1,61                                                                                |

## Таблица с артикули

| Описание                                                                                                                                                                                                                                                                         | Артикулен No. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Евакуационен осв. PM Autotest LED 3h 230V AC wall mounting<br>Safety luminaire with exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, IP65, protection class II, LiFePO4 battery, 1h:500lm, 3h:500lm, 8h: 200lm | NLPMW433SC    |
| <b>Акcesoари</b>                                                                                                                                                                                                                                                                 |               |
| Рамка за вграждане, бяла, за евакуационни осв. Design PM<br>Required ceiling cut out: 246 x 152 mm                                                                                                                                                                               | NLPME         |
| Set 2 Accus LiFePO4 3,2V 3,3Ah f. WirelessControl lum. w.LEO<br>LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries                                                                                                                              | NLAKKU323L    |
|                                                                                                                                                                                                                                                                                  | NLTESTSC2     |
| Protective cover for test buttons NLTEST2---                                                                                                                                                                                                                                     | NLTEST2COV    |