

Данни за артикула: NLWFXW009E

Евакуационни осветители WFX EL LED IP65 230V

Wall surface, with bayonet chain, centrally switchable, with single lamp supervision, Viewing distance: 60m, 230V AC/DC, Note: Delivery without pictogram - required pictogram NLWFXPIK.. must be ordered separately



Технически данни

Нето дължина (mm)	300,00
Нето ширина (mm)	300,00
Нето височина (mm)	110,00
Нето тегло (kg)	1,40
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Central power supply luminaire
Функция	with monitoring - centrally switchable
Версия	ъглов осветител
Дизайн	WFX
Цвят	RAL 9003 (white)
Pictogram	Required adhesive pictogram according to ISO 7010 to be ordered separately

Технически данни - продължение

Визуален обхват (m)	60
Осветеност	LED (5W)
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
Степен на защита - IP	IP65
Impact Resistance	IK04
Монтаж	surface mounting wall
Мин. околна температура (°C)	-20
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

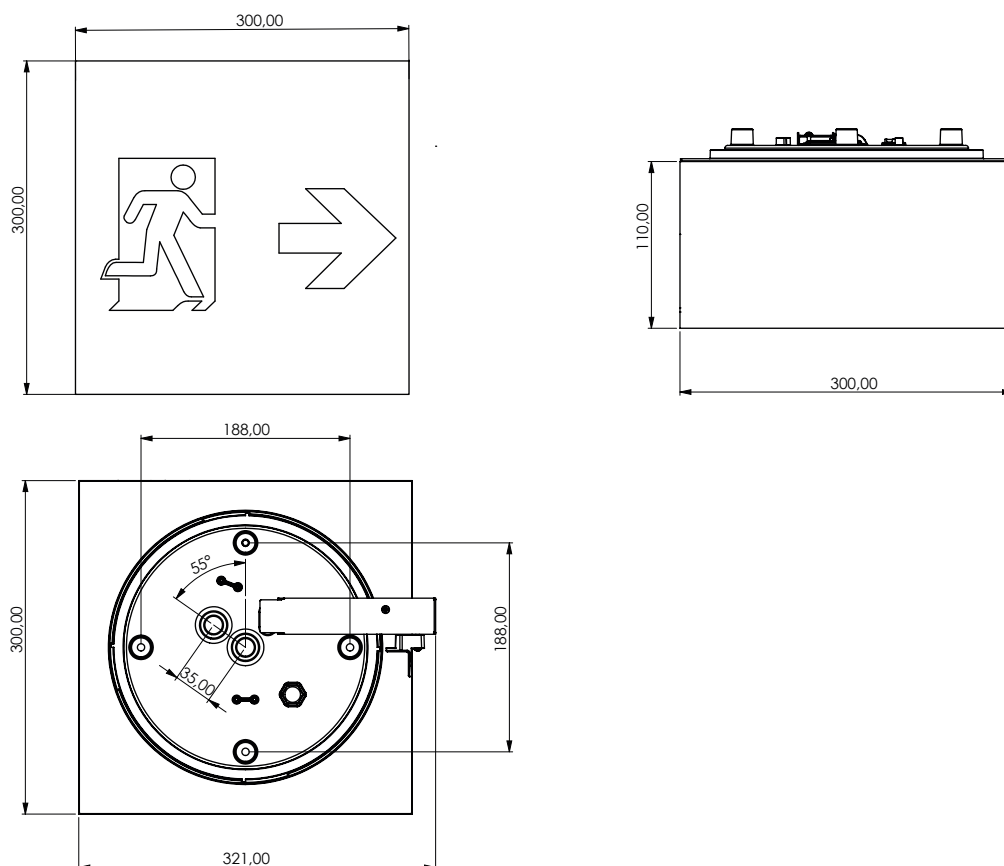


Таблица с артикули

Описание	Артикулен No.
Евакуационни осветители WFX EL LED IP65 230V Wall surface, with bayonet chain, centrally switchable, with single lamp supervision, Viewing distance: 60m, 230V AC/DC, Note: NLWFXW009E Delivery without pictogram - required pictogram NLWFXPIK.. must be ordered separately	
Необходими аксесоари	
Лепяща се пиктограма, стрелка наляво за WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKLI
Лепяща се пиктограма, стрелка нагоре за WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKOB
Лепяща се пиктограма, стрелка надясно за WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKRE
Лепяща се пиктограма, стрелка надолу за WFX Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKUN