

Данни за артикула: NLWHGD009E

Евакуационен осветител WHG EL LED IP65 230V, за окачване

Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1 W High Power LED, IP65, pictograms with arrows: left, down, right are already mounted, viewing distance: 50m



Технически данни

Нето дължина (mm)	522,00
Нето ширина (mm)	500,00
Нето височина (mm)	280,00
Нето тегло (kg)	4,19
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Central power supply luminaire
Функция	with monitoring - centrally switchable
Версия	пластмасов осветител
Дизайн	WHG
Цвят	RAL 9003 (white)
Pictogram	Pictograms with arrows left, bottom, right in accordance with ISO 7010 already affixed at the factory

Технически данни - продължение

Визуален обхват (m)	50
Осветеност	HP-LED (4W)
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
Степен на защита - IP	IP65
Impact Resistance	$\geq IK03$
Монтаж	surface mounting ceiling
Мин. околна температура ($^{\circ}\text{C}$)	-20
Макс. околна температура ($^{\circ}\text{C}$)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

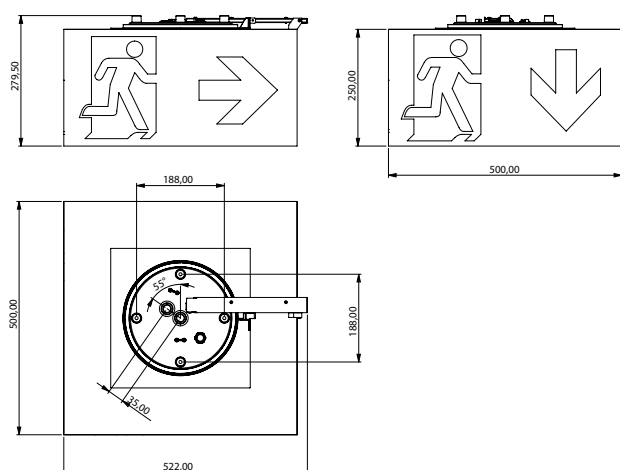


Таблица с артикули

Описание	Артикулен No.
Евакуационен осветител WHG EL LED IP65 230V, за окачване Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1W High Power LED, IP65, pictograms with arrows: left, down, right are already mounted, viewing distance: 50m	NLWHGD009E
Акcesoари	
Сет за осветителни вериги WG/WX	NLWKO
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG Tool-free length adjustment	NLDSAY4M
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG With ceiling adapter for surface mounting, tool-free length adjustment	NLDSAY4MAP