


Данни за артикула: NLWHGD403W

Emergency luminaire WHG WL LED IP65 3h 230V AC ceiling mount

Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1 W High Power LED, IP65, WirelessControl Professional, 3h autonomy time; pictograms with arrows: left, down, right are already mounted, viewing distance: 50m, radio switchable, LiFePO4 battery, WirelessControl Professional type

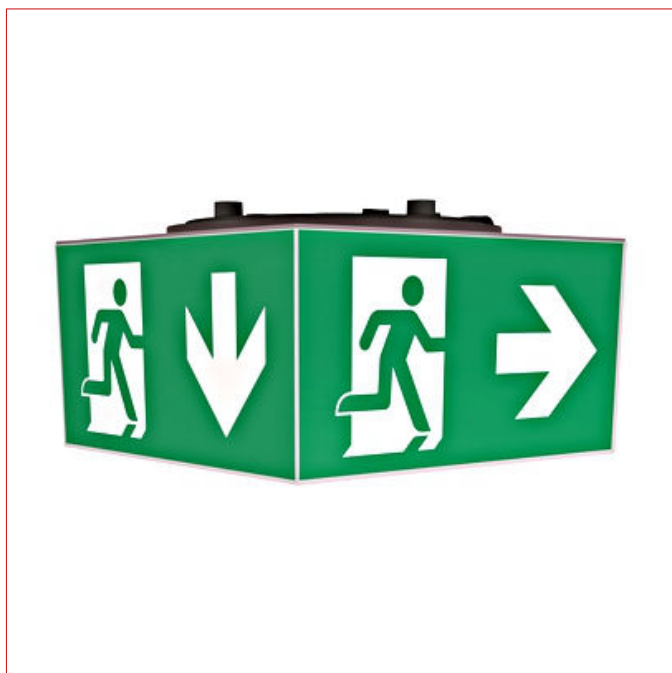

Технически данни

Нето дължина (mm)	522,00
Нето широчина (mm)	500,00
Нето височина (mm)	280,00
Нето тегло (kg)	4,34
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Professional
Версия	пластмасов осветител
Дизайн	WHG
Цвят	RAL 9003 (white)

Технически данни - продължение

Pictogram	Pictograms with arrows left, bottom, right in accordance with ISO 7010 already affixed at the factory
Визуален обхват (m)	50
Време на съхранение (h)	3
Illuminant	HP-LED (4W)
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Батерия (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Степен на защита - IP	IP65
Impact Resistance	$\geq IK03$
Монтаж	surface mounting ceiling
Мин. околна температура ($^{\circ}\text{C}$)	-5
Макс. околна температура ($^{\circ}\text{C}$)	40
AA Class E 8101	AA4
Производител	Schrack

Abmessungen (mm)

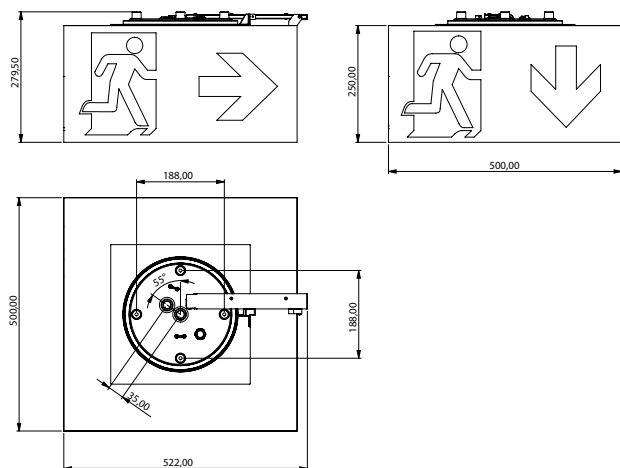


Таблица с артикули

Описание	Артикулен No.
Emergency luminaire WHG WL LED IP65 3h 230V AC ceiling mount Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1W High Power LED, IP65, WirelessControl Professional, 3h autonomy time; pictograms with arrows: left, down, right are already mounted, viewing distance: 50m, radio switchable, LiFePO4 battery, WirelessControl Professional type	NLWHGD403W
Акcesoари	
Сет за осветителни вериги WG/WX	NLWKO
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG Tool-free length adjustment	NLDSAY4M
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG With ceiling adapter for surface mounting, tool-free length adjustment	NLDSAY4MAP
Set 2 Accus LiFePO4 3,2V 3,3Ah f. WirelessControl lum. w.LEO LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L