

Данни за артикула: NLXPIU009E

EX-protect. emerg. lum. design XP EL zone 1/21 LED 230V AC/DC

without pictogram, with supervision - centrally switchable, wall or ceiling surface mounting, IP66, 1200lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)




Технически данни

Нето дължина (mm)	485,00
Нето височина (mm)	197,00
Дълбочина (mm)	157,00
Нето тегло (kg)	4,28
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Central power supply luminaire
Функция	със слеждане
Версия	explosion proof luminaire
Дизайн	XP
Цвят	Сиво
Illuminant	LED (8W)
Lumen	1200

Технически данни - продължение

MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	11
Power non-maintained mode (W)	1,50
Power max. (W)	11
Степен на защита - IP	IP66
Impact Resistance	IK05
Монтаж	surface mounting ceiling surface mounting wall
Мин. околна температура ($^{\circ}\text{C}$)	-25
Макс. околна температура ($^{\circ}\text{C}$)	50
AA Class E 8101	AA3 AA4

Чертеж: EX-protect. emerg. lum. design XP EL zone1/21 LED 230V AC/DC

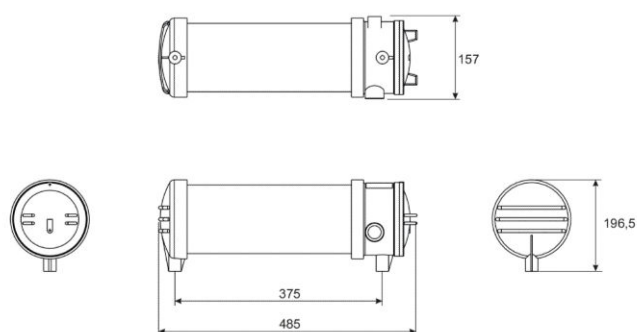

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	5,7	13,93	12,89	12,05	5,29
2,50	6,37	15,68	14,45	13,38	5,81
3,00	6,83	17,02	15,67	14,49	6,22
3,50	7,22	18,14	16,71	15,49	6,58
4,00	7,57	19,09	17,65	16,4	6,9
5,00	8,13	20,71	19,27	18	7,42
6,00	8,58	22,03	20,61	19,33	7,79
7,00	8,91	23,14	21,75	20,45	8,03
8,00	9,1	24,09	22,68	21,32	8,14
9,00	9,12	24,84	23,42	21,99	8,14
10,00	9,04	25,43	23,97	22,46	8,03
12,00	8,49	25,97	24,37	22,77	7,46
14,00	7,31	25,76	24,14	22,53	6,29
16,00	5,11	24,87	23,22	21,72	4,15

Таблица с артикули

Описание	Артикулен No.
EX-protect. emerg. lum. design XP EL zone I / 21 LED 230V AC/DC without pictogram, with supervision - centrally switchable, wall or ceiling surface mounting, IP66, 1200lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)	NLXPIU009E
Акcesoари	
Cable gland with stain relief for luminaire Design XP Metall	NLXPKE
Chain eyelets (pair) for luminaire design XP	NLXPKO
Mounting bracket (pair) for luminaire design XP	NLXPMB
Pictogram set for NLXP.. left, right, up, down Viewing distance: 14m	NLXPPIKTO