

Данни за артикула: NLXPIU011 S

## EX-protect. emerg. lum. design XP EL zone 1/21 LED 1h 230V AC

without pictogram, self control 1 h, wall or ceiling surface mounting, IP66, 750lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)




### Технически данни

|                              |                           |
|------------------------------|---------------------------|
| Нето дължина (mm)            | 485,00                    |
| Нето височина (mm)           | 197,00                    |
| Дълбочина (mm)               | 157,00                    |
| Нето тегло (kg)              | 4,28                      |
| Тип осветително тяло         | авариен осветител         |
| Автономност - централна бат. | Self contained luminaire  |
| Функция                      | саморегулиращ се          |
| Версия                       | explosion proof luminaire |
| Дизайн                       | XP                        |
| Цвят                         | Сиво                      |
| Време на съхранение (h)      | 1                         |
| Illuminant                   | LED (8W)                  |

## Технически данни - продължение

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| Lumen                          | 750                                               |
| MPP диапазон на напрежение (V) | 230V AC 50Hz $\pm 20\%$                           |
| Power maintained mode (W)      | 24                                                |
| Power non-maintained mode (W)  | 3                                                 |
| Power max. (W)                 | 24                                                |
| Батерия (V/Ah)                 | 6/1,6 NiCd                                        |
| Степен на защита - IP          | IP66                                              |
| Impact Resistance              | IK05                                              |
| Монтаж                         | surface mounting ceiling<br>surface mounting wall |
| Мин. околна температура (°C)   | 5                                                 |
| Макс. околна температура (°C)  | 40                                                |
| AA Class E 8101                | AA5                                               |

## Чертеж: EX-protect. emerg. lum. design XP EL zone1/21 LED 1h 230V AC

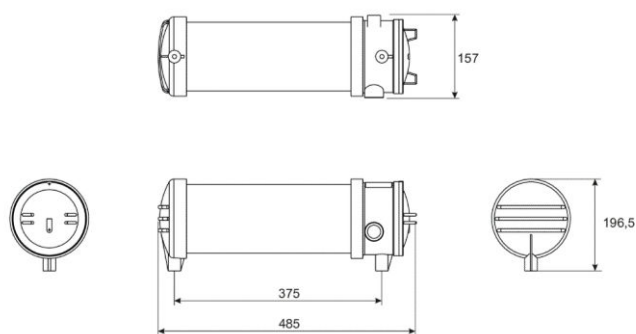

## Таблица с артикули

| Описание                                                                                                                                                                                                                                                                          | Артикулен No. |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| EX-protect. emerg. lum. design XP EL zone I / 21 LED 1h 230V AC<br>without pictogram, self control 1h, wall or ceiling surface mounting, IP66, 750lm, Required accessories: cable gland (NLXPKE),<br>mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO) | NLXPIU011S    |
| <b>Акcesoари</b>                                                                                                                                                                                                                                                                  |               |
| Cable gland with strain relief for luminaire Design XP<br>Metall                                                                                                                                                                                                                  | NLXPKE        |
| Chain eyelets (pair) for luminaire design XP                                                                                                                                                                                                                                      | NLXPKO        |
| Mounting bracket (pair) for luminaire design XP                                                                                                                                                                                                                                   | NLXPMB        |
| Pictogram set for NLXP.. left, right, up, down<br>Viewing distance: 14m                                                                                                                                                                                                           | NLXPPIKTO     |