

Данни за артикула: NLXPIU411 S

EX-protect. emerg. lum. design XP EL zone 1/21 LED 1h 230V AC

without pictogram, self control 1 h, wall or ceiling surface mounting, IP66, 840lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)



Технически данни

Нето дължина (mm)	485,00
Нето височина (mm)	197,00
Дълбочина (mm)	157,00
Нето тегло (kg)	4,28
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	саморегулиращ се
Версия	explosion proof luminaire
Дизайн	XP
Цвят	Сиво
Време на съхранение (h)	1
Illuminant	LED (8W)

Технически данни - продължение

Lumen	840
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	24
Power non-maintained mode (W)	3
Power max. (W)	24
Батерия (V/Ah)	3,2/3,0 LiFePO4
Степен на защита - IP	IP66
Impact Resistance	IK10
Монтаж	surface mounting ceiling surface mounting wall
Мин. околна температура (°C)	0
Макс. околна температура (°C)	50
AA Class E 8101	AA5

Чертеж: EX-protect. emerg. lum. design XP EL zone1/21 LED 1h 230V AC

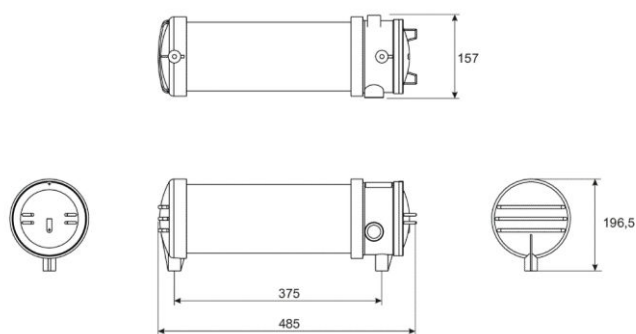


Таблица с артикули

Описание	Артикулен No.
EX-protect. emerg. lum. design XP EL zone I / 21 LED 1h 230V AC without pictogram, self control 1h, wall or ceiling surface mounting, IP66, 840lm, Required accessories: cable gland (NLXPKE), mounting bracket (NLXPMB), chain eyelets (NLXPKO), pictogram set (NLXPPIKTO)	NLXPIU411S
Акcesoари	
Cable gland with stain relief for luminaire Design XP Metall	NLXPKE
Chain eyelets (pair) for luminaire design XP	NLXPKO
Mounting bracket (pair) for luminaire design XP	NLXPMB
Pictogram set for NLXP.. left, right, up, down Viewing distance: 14m	NLXPPIKTO