

Данни за артикула: NLZAAC03SC

Самостоятелен осветител ZAA Wireless LED 3h 8h, 230VAC стена

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting



Технически данни

Нето дължина (mm)	315,00
Нето височина (mm)	140,00
Дълбочина (mm)	65,00
Нето тегло (kg)	2,20
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	SelfControl Low Temperature
Версия	метален осветител
Дизайн	ZA
Цвят	Антрацит
Време на съхранение (h)	3
Осветеност	LED (2W)
Лумен	1h: 170;3h: 170;8h: 76
MPP диапазон на напрежение (V)	230V AC 50Hz ±20%
Батерия (V/Ah)	3,2/3,0 LiFePO4
Степен на защита - IP	IP65
Монтаж	surface mounting wall
Мин. околна температура (°C)	-25
Макс. околна температура (°C)	40

Технически данни - продължение

AA Class E 8101

AA3


AA4

AA5


Производител

Schrack


Dimensions (mm)

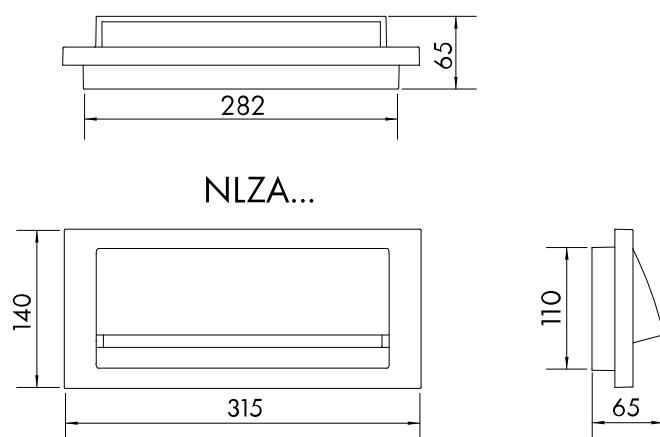

Drilling distances (mm)

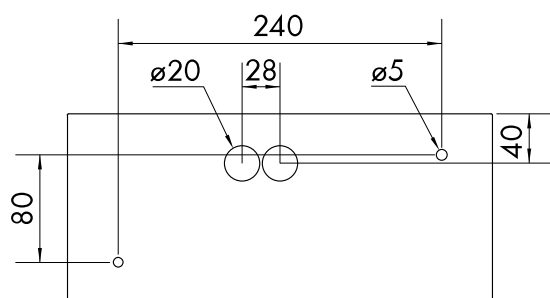

Housing IP54 for COOL-version (mm)

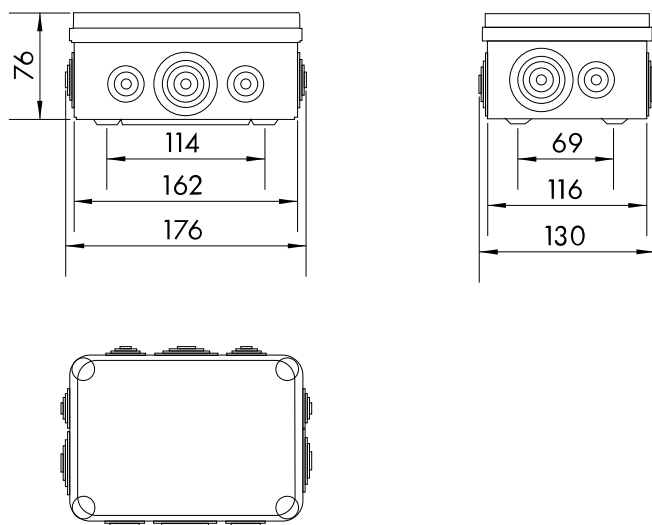

Таблични файлове: Самостоятелен осветител ZAA Wireless LED 3h 8h, 230VAC стена

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Таблица с артикули

Описание	Артикулен No.
Самостоятелен осветител ZAA Wireless LED 3h 8h, 230VAC стена Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting	NLZAAC03SC
Акcesoари	
Accu 3,2V 3,0Ah LiFePO4 f.self contained LED осв.KSC,KMB ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230