

Данни за артикула: NLZAAC03WL

Самостоятелен осветител ZAA Wireless LED 3h 230VAC за стена

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, WirelessControl Professional type



Технически данни

Нето дължина (mm)	315,00
Нето височина (mm)	140,00
Дълбочина (mm)	65,00
Нето тегло (kg)	2,20
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Low Temperature
Версия	метален осветител
Дизайн	ZA
Цвят	Антрацит
Време на съхранение (h)	3
Осветеност	LED (2W)
Лумен	170
МРР диапазон на напрежение (V)	230V AC 50Hz ±20%
Батерия (V/Ah)	3,2/3,0 LiFePO4
Степен на защита - IP	IP65
Монтаж	surface mounting wall
Мин. околна температура (°C)	-25
Макс. околна температура (°C)	40

Технически данни - продължение

AA Class E 8101

AA3


AA4

AA5


Производител

Schrack


Dimensions (mm)

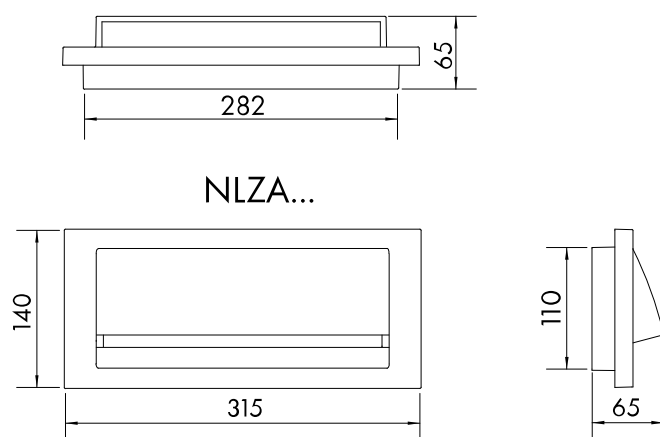

Drilling distances (mm)

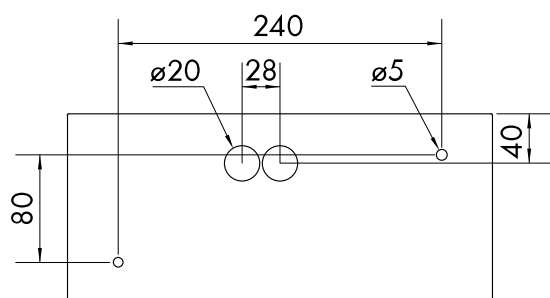

Housing IP54 for COOL-version (mm)

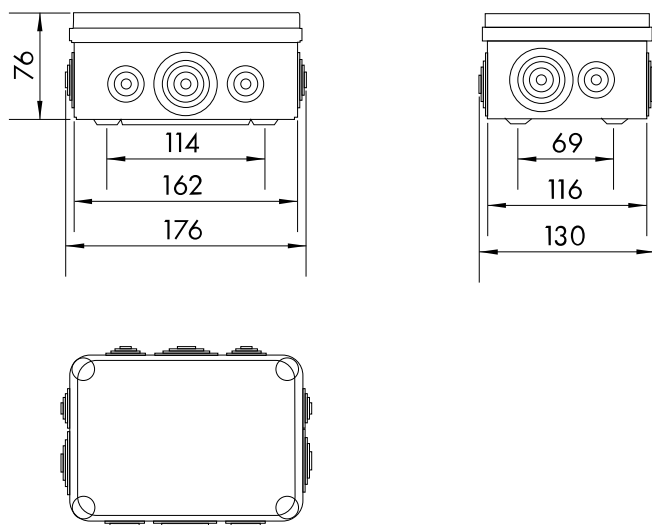

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	0,00	3,03	5,33	10,38	4,29
2,50	0,00	3,20	5,88	11,66	4,70
3,00	0,00	3,29	6,16	12,75	4,80
3,50	0,00	3,27	4,21	12,99	2,73
4,00	0,00	3,29	2,77	11,96	0,00

Таблица с артикули

Описание	Артикулен No.
Самостоятелен осветител ZAA Wireless LED 3h 230VAC за стена Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, WirelessControl Professional type	NLZAAC03WL
Акcesoари	
Accu 3,2V 3,0Ah LiFePO4 f.self contained LED осв.KSC,KMB ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230