

Данни за артикула: NLZAAT03WB

Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Zinc die-cast, anthracite, IP65, -25° up to 40°C, with LiFePO4 battery suitable for low temperatures, wall mounting, with Bluetooth communication, 190lm




Технически данни

Нето дължина (mm)	315,00
Нето височина (mm)	140,00
Дълбочина (mm)	65,00
Нето тегло (kg)	2,20
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessConnect Low Temperature
Версия	метален осветител
Дизайн	ZA
Цвят	RAL 7016 (anthracite)
Време на съхранение (h)	3
Illuminant	LED (2W)
Lumen	190


Технически данни - продължение

MPP диапазон на напрежение (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Батерия (V/Ah)	3,2V/3,3Ah LiFePO4-TT
Степен на защита - IP	IP65
Impact Resistance	IK08
Монтаж	surface mounting wall
Мин. околна температура (°C)	-25
Макс. околна температура (°C)	40
AA Class E 8101	AA3 AA4 AA5
Производител	Schrack

Abmessungen (mm)

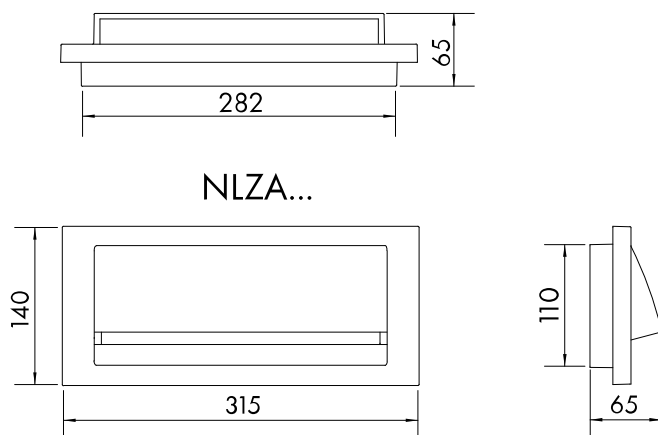

Bohrabstände (mm)

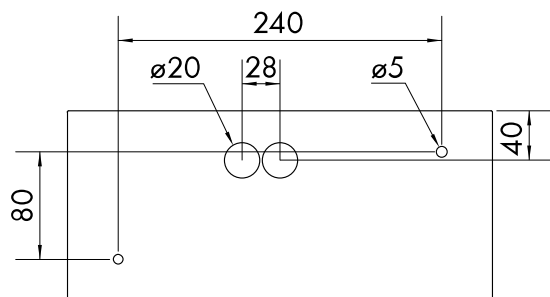

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Таблица с артикули

Описание	Артикулен No.
Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect Zinc die-cast, anthracite, IP65, -25° up to 40°C, with LiFePO4 battery suitable for low temperatures, wall mounting, with Bluetooth NLZAAT03WB communication, 190lm	
Акcesoари	
Батерия LiFePO4 3.2V 3.3Ah за LED осв., KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T