

Данни за артикула: NLZAAT03WL

Евакуационен осветител ZA WL LED 3h 230V AC

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery suitable for low temperatures, wall mounting, radio switchable, 190lm, WirelessControl Professional type




Технически данни

Нето дължина (mm)	315,00
Нето височина (mm)	140,00
Дълбочина (mm)	65,00
Нето тегло (kg)	2,20
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Low Temperature
Версия	метален осветител
Дизайн	ZA
Цвят	RAL 7016 (anthracite)
Време на съхранение (h)	3
Осветеност	LED (2W)


Технически данни - продължение

Лумен	190
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Батерия (V/Ah)	3,2V/3,3Ah LiFePO4-TT
Степен на защита - IP	IP65
Impact Resistance	IK08
Монтаж	surface mounting wall
Мин. околна температура ($^{\circ}\text{C}$)	-25
Макс. околна температура ($^{\circ}\text{C}$)	40
AA Class E 8101	AA3 AA4 AA5
Производител	Schrack

Dimensions (mm)

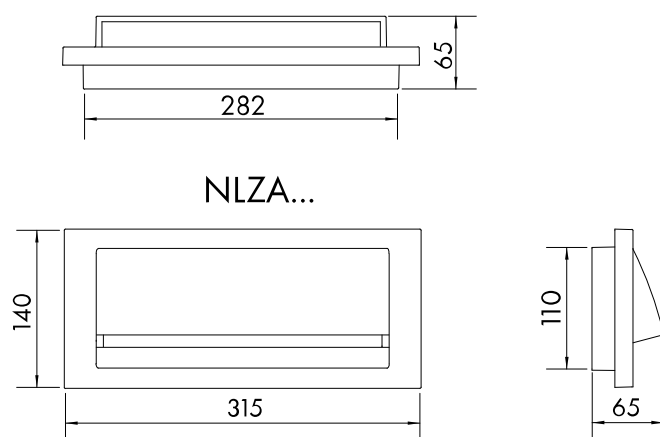

Drilling distances (mm)

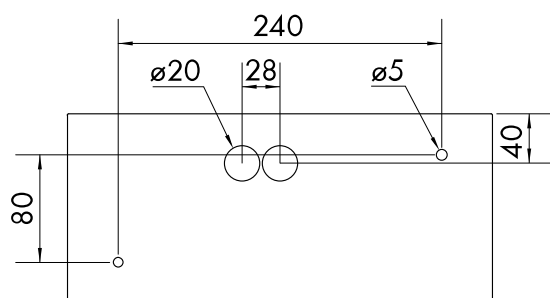

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Таблица с артикули

Описание	Артикулен No.
Евакуационен осветител ZA WL LED 3h 230V AC Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery suitable for low temperatures, wall mounting, radio switchable, 190lm, WirelessControl Professional type	NLZAAT03WL
Акcesoари	
Батерия LiFePO4 3.2V 3.3Ah за LED осв., KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T