

Данни за артикула: NLZAW003WB

Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Wall surface mounting, with LiFePO₄ battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 170lm



Технически данни

Нето дължина (mm)	315,00
Нето височина (mm)	140,00
Дълбочина (mm)	65,00
Нето тегло (kg)	2,20
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessConnect
Версия	метален осветител
Дизайн	ZA
Цвят	Бяло
Време на съхранение (h)	3
Illuminant	LED (2W)
Lumen	170


Технически данни - продължение

MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Батерия (V/Ah)	3,2/3,3 LiFePO4
Степен на защита - IP	IP65
Impact Resistance	IK08
Монтаж	surface mounting wall
Мин. околна температура ($^{\circ}\text{C}$)	-5
Макс. околна температура ($^{\circ}\text{C}$)	40
AA Class E 8101	AA4
Производител	Schrack

Abmessungen (mm)



Bohrabstände (mm)

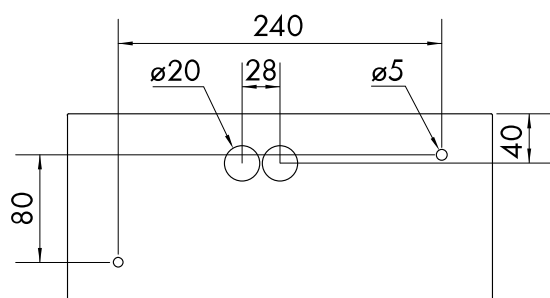

Таблични файлове: Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Таблица с артикули

Описание	Артикулен No.
Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect Wall surface mounting, with LiFePO4 battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 170lm	NLZAW003WB
Акcesoари	
Accu 3,2V 3,0Ah LiFePO4 f.self contained LED осв.KSC,KMB ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230