

Данни за артикула: NLZAWC03WL

Самостоятелен тяло ZAW Wireless LED 3h 230VAC за стена

Zinc die-cast, white, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, 170lm, WirelessControl Professional type



Технически данни

Нето дължина (mm)	315,00
Нето височина (mm)	140,00
Дълбочина (mm)	65,00
Нето тегло (kg)	2,20
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Low Temperature
Версия	метален осветител
Дизайн	ZA
Цвят	Бяло
Време на съхранение (h)	3
Illuminant	LED (2W)
Lumen	170
MPP диапазон на напрежение (V)	230V AC 50Hz ±20%
Батерия (V/Ah)	3,2/3,0 LiFePO4
Степен на защита - IP	IP65
Монтаж	surface mounting wall
Мин. околна температура (°C)	-25
Макс. околна температура (°C)	40

Технически данни - продължение

AA Class E 8101

AA3

AA4

AA5


Производител

Schrack

Dimensions (mm)



Drilling distances (mm)

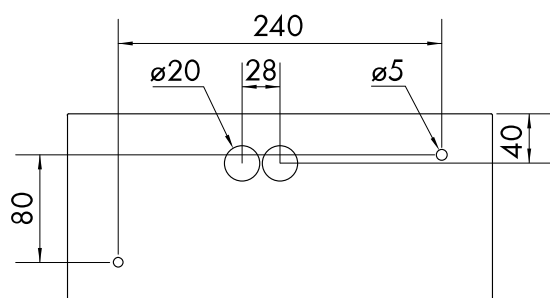

Housing IP54 for COOL-version (mm)



Таблични файлове: Самостоятелен тяло ZAW Wireless LED 3h 230VAC за стена

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Таблица с артикули

Описание	Артикулен No.
Самостоятелен тяло ZAW Wireless LED 3h 230VAC за стена	
Zinc die-cast, white, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, 170lm, WirelessControl Professional type	NLZAWC03WL
Акcesoари	
Accu 3,2V 3,0Ah LiFePO4 f.self contained LED осв.KSC,KMB ZAW	
For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230