

Данни за артикула: RMX72730--

Сигово реле, 3 CO, 16A, 230VAC

S-RELAY series RMX, Faston 187, with LED indicator



Технически данни

Мин. околна температура (°C)	-40
Макс. околна температура (°C)	55
Превключващи контакти	3 ПК
Ток на контактите (A)	16
Rated current [Resistive load] (A)	16
Rated voltage [Resistive load]	400VAC / 30VDC
Switching capacity [Resistive]	6400VA / 480W
Материал на контактите	Ag alloy
Initial contact resistance (Ohm)	≤50mΩ
Електрическа износоустойчивост (работни цикли)	≥ 10 ⁵ operations (1800 operations/h)
Mechanical durability	≥ 10 ⁷ operations (18000 operations/h)
Pick-up voltage AC (V)	≤ 80% (Rated voltage)
Drop-out voltage AC	≥ 10% (Bemessungsspannung)
Maximum voltage (V)	110% (Rated voltage)
Insulation resistance (MΩ*km)	≥ 100mΩ (500VDC)
Operate time [at nominal voltage] (ms)	≤ 20ms
Release time [at nominal voltage] (ms)	≤ 20ms
Initial breakdown voltage	
Between open contacts	1500VAC/1min


Технически данни - продължение

Between poles	4000VAC/1 min
Humidity (%)	35% - 85% RH
Налягане на въздуха	90 - 106kPa
shock resistance	10G
Vibration resistance	14 - 55Hz


Coil information

Номинално напрежение	230V-AC
Coil resistance	8000Ω
Нето тегло (kg)	0,09
Разсейвана мощност (W)	2,80


Характеристика: Силово реле, 3 CO, 16A, 230VAC

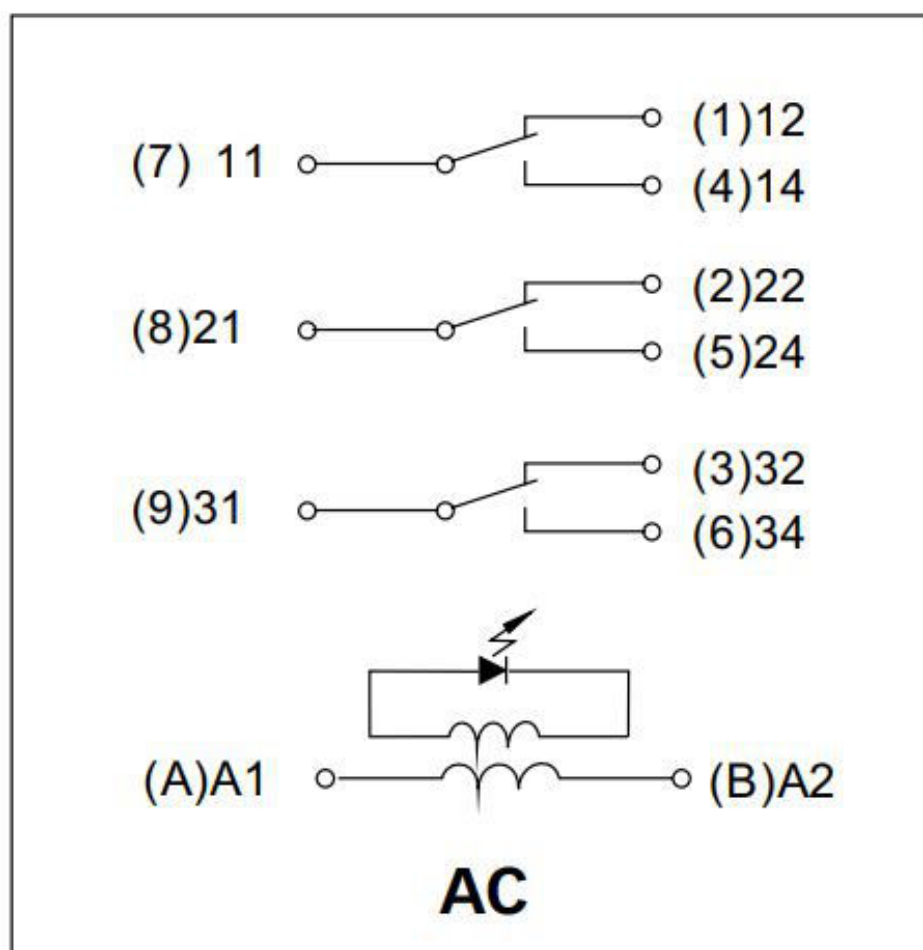

Чертеж: Силово реле, 3 CO, 16A, 230VAC

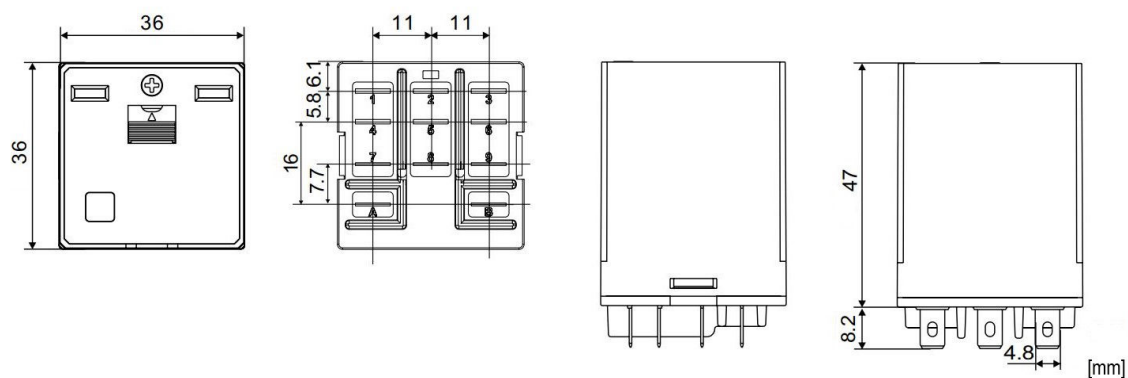

Electrical Durability Contacts - resistive load

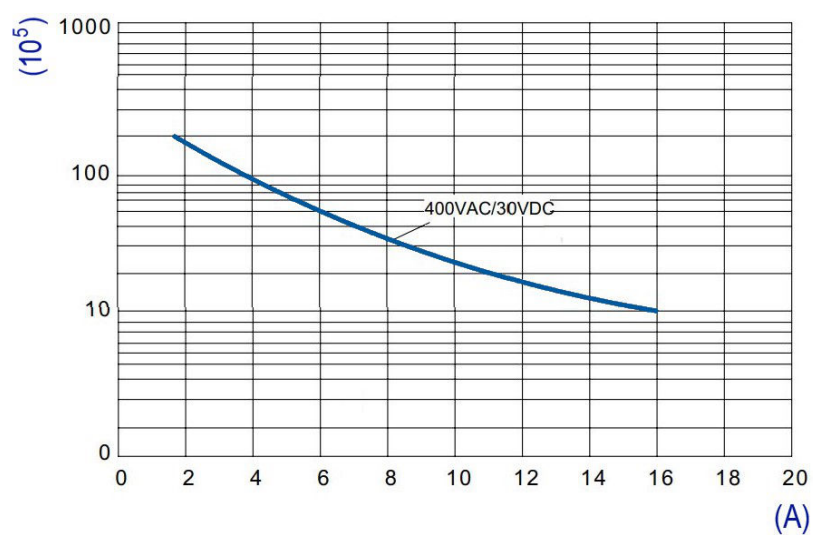

Maximum Switching Capacity - resistive Load

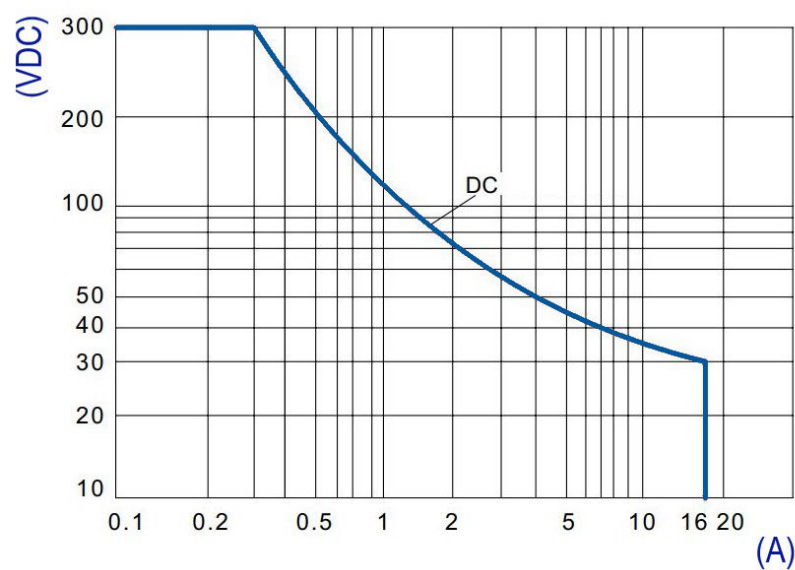


Таблица с артикули

Описание	Артикулен No.
Силово реле, 3 CO, 16A, 230VAC S-RELAY series RMX, Faston 187, with LED indicator	RMX72730
Акcesoари	
Цокъл с винтови клеми, 11 пина, 25A за 3 CO RMX релета S-RELAY series RMX, Faston 187	RMX78705
Монтажен адаптер за релета RMX S-RELAY series RMX, with fastening to the mounting plate horizontal or vertical	RMX21803