

Данни за артикула: RPSET4524-

Компл.: РСВ Реле, 2 СО, 8А, 24VAC, 5mm/ цокъл/ скоба

Wash tight, PBC relay with marking tag, S-Relay, series RPS




Технически данни

Нето тегло (kg)	0,06
Мин. околна температура (°C)	-40
Макс. околна температура (°C)	85
Rated current [Resistive load] (A)	8
Rated voltage [Resistive load]	250VAC
Switching capacity [Resistive]	2000VA
Maximum voltage (V)	440VAC/300VDC
Материал на контактите	AgNi
Initial contact resistance (Ohm)	≤100mΩ (1A 6VDC)
Електрическа износостойчивост (работни цикли)	50000
Mechanical durability	10000000 Operating cycles
Insulation resistance (MΩ*km)	1000MΩ (500VDC)
Initial breakdown voltage	
Between open contacts	1000VAC 1min
Between poles	2500VAC 1min
Between contact and coil	5000VAC 1min
Vibration resistance	10Hz - 150Hz 10g/5g


Технически данни - продължение

Humidity (%)	5% - 85% RH
Coil information	
Pick-up voltage AC (V)	18V
Drop-out voltage AC	3.6V
Coil resistance	350 x (1±10%)Ω
Цокъл	
Номинално напрежение	250V-AC
Номинален ток (A)	10
Температурен обхват - работен (°C)	-40 to +70
Диелектрична якост	5000VAC
Tightening torque (Nm)	0,6N.m


Dimensions and Circuit Diagram: relay

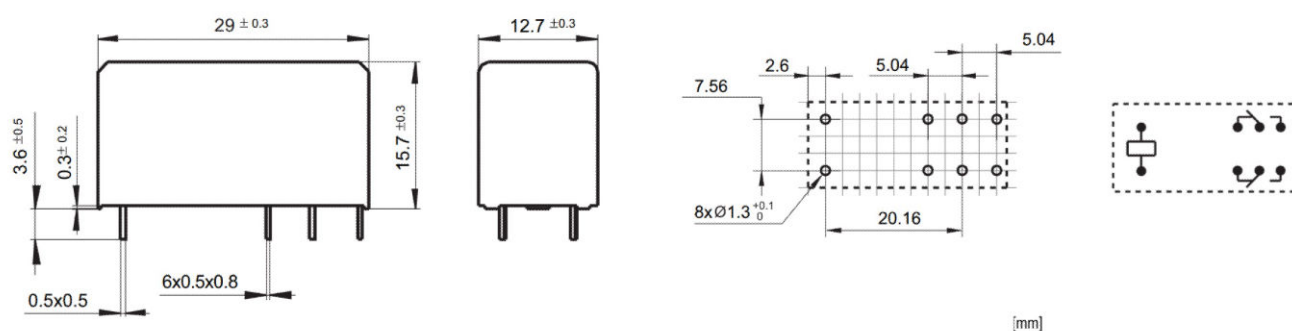


Dimensions and Circuit Diagram: Socket

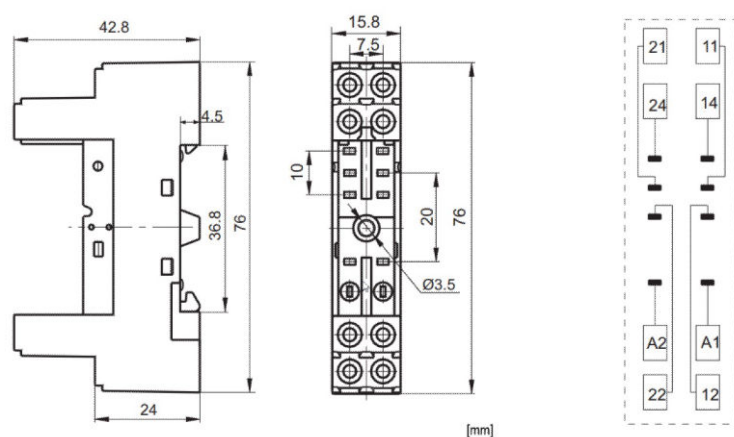


Dimensions: Retaining clip

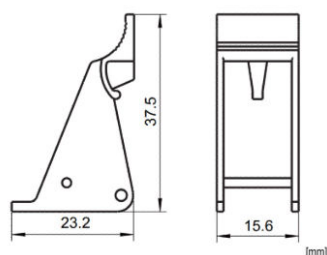


Dimensions: Marking tag

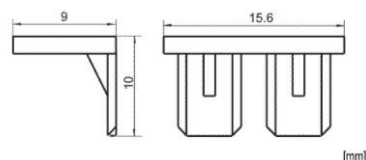


Диаграма: Компл.: PCB Реле, 2 СО, 8А, 24VAC, 5mm/цокъл/скоба

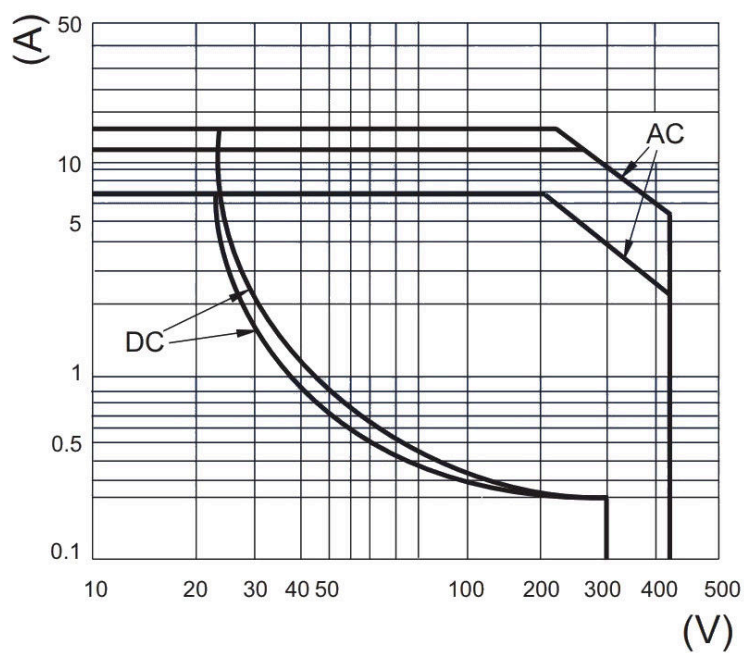

Electrical endurance 1) Operations 2) Breaking capacity

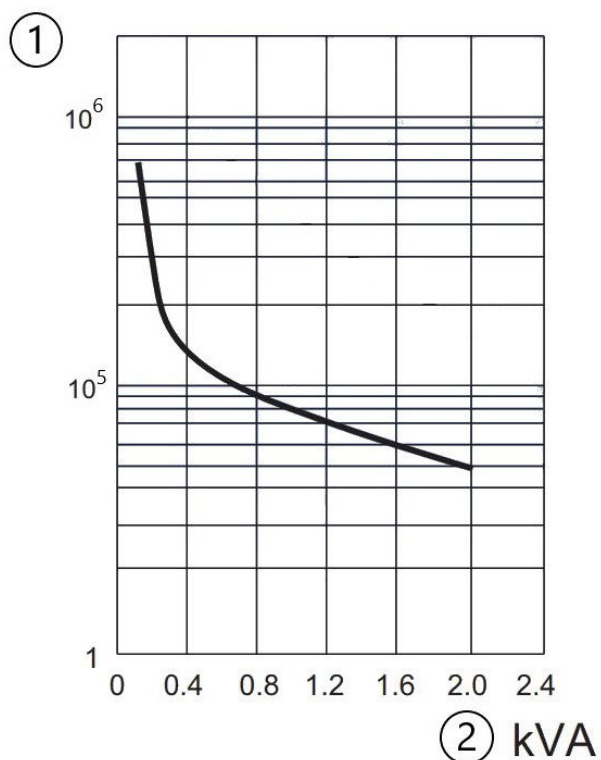

Coil operating range 1) Coil voltage 2) Ambient temperature 3) Recommended voltage

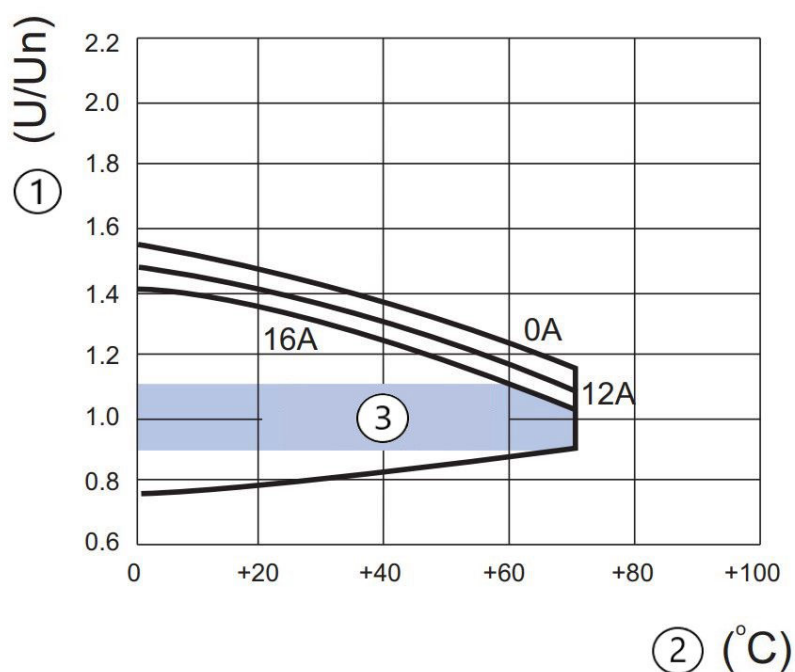

Описание	Артикулен No.
Компл.: PCB Реле, 2 CO, 8A, 24VAC, 5mm/цокъл/скоба Wash tight, PBC relay with marking tag, S-Relay, series RPS	RPSET4524