

Данни за артикула: WST1006300

Табло метално за стениен м-ж, с 1 врата, IP65, 1000x600x300mm

Метални, RAL7035, с монтажна плоча, с 2 ключалки, с 1 плоча за кабелни входи
Ш=505 Д=119 mm



SCHRACK-Info

- Material: Solid, cross-shaped construction, which is folded and welded from a cold-pressed sheet steel plate regardless of the size of the enclosure.
- The enclosure consists of two parts: Body and door.
- Gland plates: 1.4mm powder coated sheet steel. The body front of the enclosure is a double-edged rain gutter to allow water to drain. The enclosure can be rotated by 180°, so the cable entry is possible via gland plate openings in the base or at the top. 4 wall mounting holes with 8.5mm diameter arranged in the corners of the rear wall. All mounting holes have 20mm edge distance. All parts are pre-treated with iron phosphate, demineralised and protected by an epoxy-polyester powder-structure coating in RAL7035.
- The door is secured by hinges and has an opening angle of 130°. The door is mounted using safety pins and the hinges are hidden. The door hinge can be changed easily from right to left. The doors have a foamed polyurethane seal.
- Mounting plate: Galvanised sheet steel, 2mm, folded on all sides. The mounting plate folded on all sides is mounted on welded M8 bolts on the rear of the enclosure and can be removed for mounting and wiring. The mounting plate is made of 2mm sendzimir galvanized sheet steel to comply with EMC guidelines. It has earthing points to establish a connection to the enclosure body.
- Protection class: Maximum protection for the devices is guaranteed due to the high degree of protection and impact resistance IK10 according to IEC 60529 standards. Corrosion protection for additional drilling should be considered.

- Mounting: The enclosure is mounted to the wall with screws (with plastic washers inside) directly with the rear wall or with a mounting kit (accessory WSTWB004 / WSTWB006), in both cases the IP degree of protection is maintained. The small opening radius of the doors makes it easy to mount enclosures directly next to each other.
- Delivery includes: Complete enclosure with gasket and screws, keys DIN 5mm and mounting plate incl. mounting material. Grounding possibilities are given.



Технически данни

Нето широчина (mm)	600,00
Нето височина (mm)	1.000,00
Дълбочина (mm)	300,00
Нето тегло (kg)	41,17
Мин. околна температура (°C)	-20
Макс. околна температура (°C)	70
Тип	Wall-mounted enclosure sheet steel
Височина (mm)	1000
Широчина (mm)	600
Дълбочина (mm)	300
Total Load Capacity (kg)	235
Дебелина на материала на таблото (mm)	1,50
Степен на защита - IP	IP65
Монтажна плоча	galvanized sheet steel 2mm
Mounting Plate Load Capacity (kg)	190
Mounting plate wall thickness (mm)	2
Mounting plate height (mm)	940
Mounting plate width (mm)	540
Брой врати	1
Load capacity per door (kg)	30
Брой гумирани плочи	1
Дебелина на стената на вратата (mm)	2
Армиране на врати	Included
Lock	2
Hinge	3
Тип гумирана плоча	F
Широчина на плочата за каб. вх. (mm)	505
Дълбочина на плочата за каб. вх. (mm)	119
Rear wall mounting	6
Цвят	RAL 7035 (Light grey)
Разсейвана мощност (W)	-314,00
Клас на защита	I

Dimension drawing

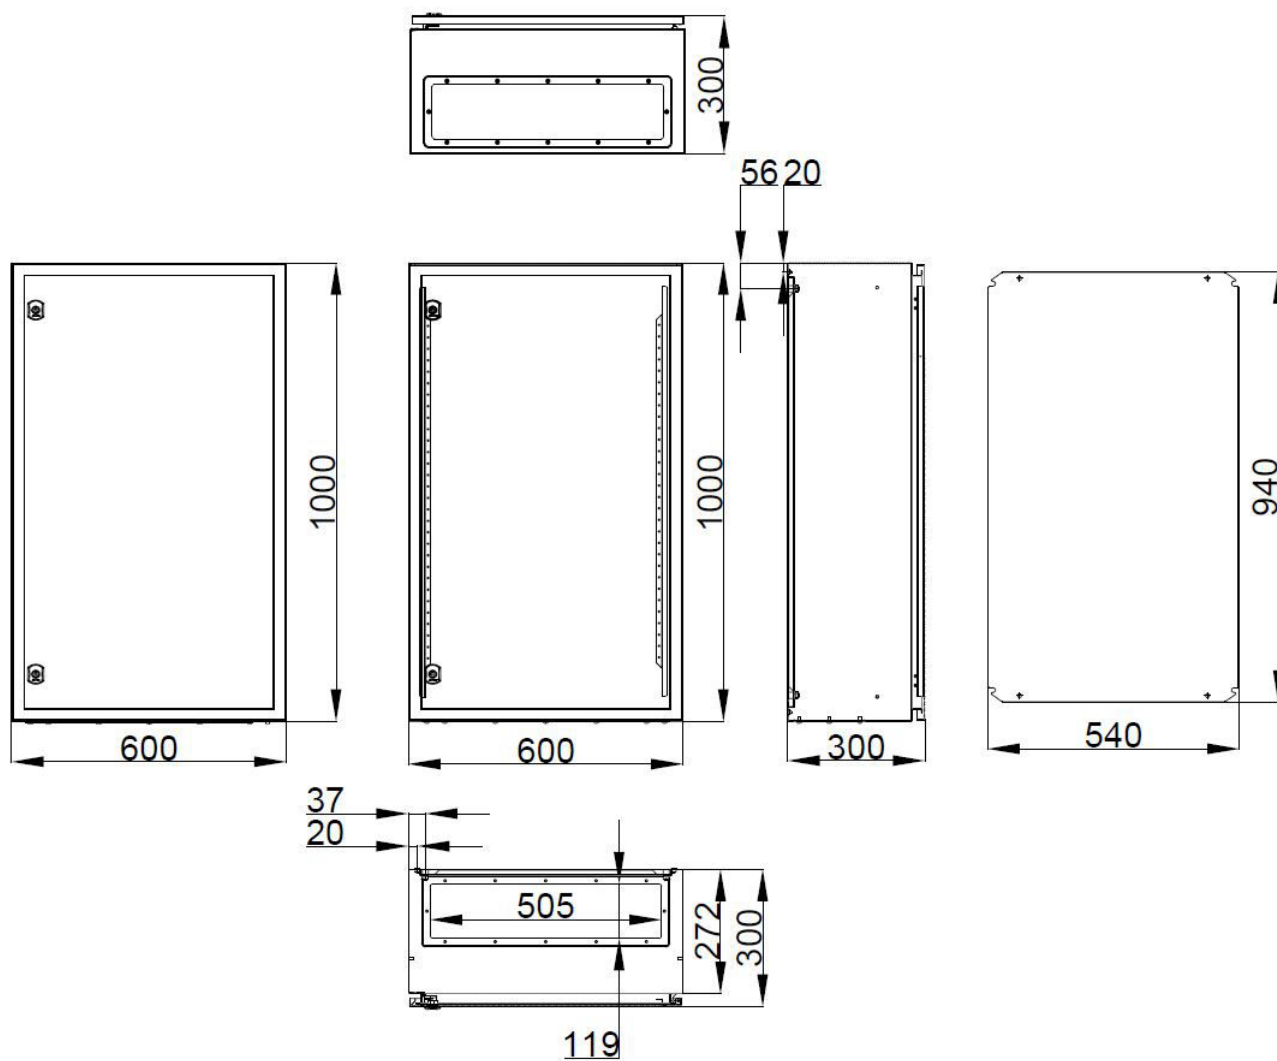


Таблица с артикули

Описание	Артикулен No.
Табло метално за стенен м-ж, с 1 врата, IP65, 1000x600x300mm	WST1006300
Метални, RAL7035, с монтажна плоча, с 2 ключалки, с 1 плоча за кабелни входи Ш=505 Д=119 mm	
Акcesoари	
Скоби за стенен монтаж за табла WST, с вис. 1000-1200mm	WSTWB006
Комплект 6 бр.	
Заземителна връзка, дължина 260mm	WSTCUF260
Фланец с вентилационен отвор за табла WST, 505x119mm	WSTVF003
Gland plate type F	
Фланец за кабелни входи за WST, 27xM16, 5xM20, 4xM25,2xM32	WSTFA0F1
предварително подготвени кабелни входи с тапи, размер на плочата Ш=505 Д=119 mm, RAL7035	
Фланец за кабелни входи за WST, 18xM16, 14xM20, 3xM25, 1xM32	WSTFA0F2
предварително подготвени кабелни входи с тапи, размер на плочата Ш=505 Д=119 mm, RAL7035	
Адаптер за плоча за каб. вх. за табла WST, Ш=505 Д=119 mm	WSTVBF04
RAL7035	
Гумиран кабелен вход 28mm, 6 входа, (10 броя)	WSTCEG2806
3x 3,4mm, 3x 5-9mm	
Гумиран кабелен вход 40mm, 10 входа, (10 броя)	WSTCEG4010
3x 5-14mm, 7x 2-7mm	
Гумиран кабелен вход 50mm, 8 входа, (5 броя)	WSTCEG5008
2x 3-7mm, 1x 12-21mm, 1x 7-15mm, 4x 4-10mm	
Гумиран кабелен вход 50mm, 7 входа, (5 броя)	WSTCEG5007
7x 6-13mm	
Стандартна ключалка 5 mm за табла WST	WSTL3532
подходящ ключ = DV903532	
Cylinder sash lock	WSSL3844-A
Секретна ключалка за табла WST, с ключ 5333	DV905333
с два ключа тип 5333	