

Данни за артикула: WST6040150

## Табло метално за стенин м-ж, с 1 врата, IP65, 600x400x155mm

Метални, RAL7035, с монтажна плоча, с 2 ключалки, с 1 плоча за кабелни входи  
Ш=329 Д=90 mm



### SCHRACK-Info

- Material: Solid, cross-shaped construction, which is folded and welded from a cold-pressed sheet steel plate regardless of the size of the enclosure.
- The enclosure consists of two parts: Body and door.
- Gland plates: 1.4mm powder coated sheet steel. The body front of the enclosure is a double-edged rain gutter to allow water to drain. The enclosure can be rotated by 180°, so the cable entry is possible via gland plate openings in the base or at the top. 4 wall mounting holes with 8.5mm diameter arranged in the corners of the rear wall. All mounting holes have 20mm edge distance. All parts are pre-treated with iron phosphate, demineralised and protected by an epoxy-polyester powder-structure coating in RAL7035.
- The door is secured by hinges and has an opening angle of 130°. The door is mounted using safety pins and the hinges are hidden. The door hinge can be changed easily from right to left. The doors have a foamed polyurethane seal.
- Mounting plate: Galvanised sheet steel, 2mm, folded on all sides. The mounting plate folded on all sides is mounted on welded M8 bolts on the rear of the enclosure and can be removed for mounting and wiring. The mounting plate is made of 2mm sendzimir galvanized sheet steel to comply with EMC guidelines. It has earthing points to establish a connection to the enclosure body.
- Protection class: Maximum protection for the devices is guaranteed due to the high degree of protection and impact resistance IK10 according to IEC 60529 standards. Corrosion protection for additional drilling should be considered.


- Mounting: The enclosure is mounted to the wall with screws (with plastic washers inside) directly with the rear wall or with a mounting kit (accessory WSTWB004 / WSTWB006), in both cases the IP degree of protection is maintained. The small opening radius of the doors makes it easy to mount enclosures directly next to each other.
- Delivery includes: Complete enclosure with gasket and screws, keys DIN 5mm and mounting plate incl. mounting material. Grounding possibilities are given.



## Технически данни

|                                       |                                    |
|---------------------------------------|------------------------------------|
| Нето широчина (mm)                    | 400,00                             |
| Нето височина (mm)                    | 600,00                             |
| Дълбочина (mm)                        | 155,00                             |
| Нето тегло (kg)                       | 12,61                              |
| Мин. околна температура (°C)          | -20                                |
| Макс. околна температура (°C)         | 70                                 |
| Тип                                   | Wall-mounted enclosure sheet steel |
| Височина (mm)                         | 600                                |
| Широчина (mm)                         | 400                                |
| Дълбочина (mm)                        | 155                                |
| Total Load Capacity (kg)              | 115                                |
| Дебелина на материала на таблото (mm) | 1,20                               |
| Степен на защита - IP                 | IP65                               |
| Монтажна плоча                        | galvanized sheet steel 2mm         |
| Mounting Plate Load Capacity (kg)     | 90                                 |
| Mounting plate wall thickness (mm)    | 2                                  |
| Mounting plate height (mm)            | 540                                |
| Mounting plate width (mm)             | 350                                |
| Брой врати                            | 1                                  |
| Load capacity per door (kg)           | 20                                 |
| Брой гумирани плочи                   | 1                                  |
| Дебелина на стената на вратата (mm)   | 1,20                               |
| Армиране на врати                     | Included                           |
| Lock                                  | 2                                  |
| Hinge                                 | 2                                  |
| Тип гумирана плоча                    | C                                  |
| Широчина на плочата за каб. вх. (mm)  | 300                                |
| Дълбочина на плочата за каб. вх. (mm) | 60                                 |
| Rear wall mounting                    | 4                                  |
| Цвят                                  | RAL 7035 (Light grey)              |
| Разсейвана мощност (W)                | -114,00                            |
| Клас на защита                        | I                                  |

## Dimension drawing

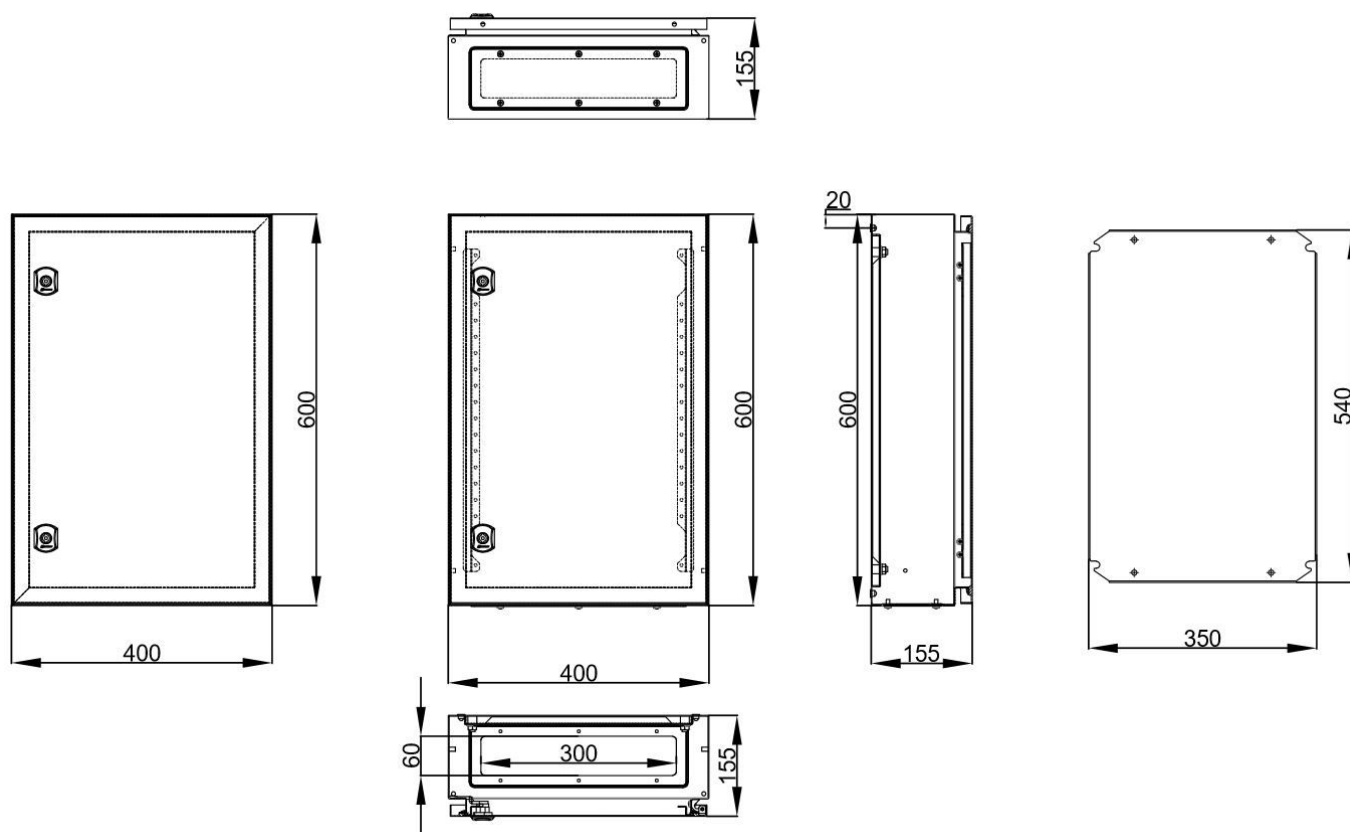

## Таблица с артикули

| Описание                                                                                   | Артикулен No. |
|--------------------------------------------------------------------------------------------|---------------|
| Табло метално за стенен м-ж, с 1 врата, IP65, 600x400x155mm                                | WST6040150    |
| Метални, RAL7035, с монтажна плоча, с 2 ключалки, с 1 плоча за кабелни входи Ш=329 Д=90 mm |               |
| <b>Акcesoари</b>                                                                           |               |
| Скоби за стенен монтаж за табла WST, с вис. до 800mm                                       | WSTWB004      |
| Комплект 4 бр.                                                                             |               |
| Заземителна връзка, дължина 260mm                                                          | WSTCUF260     |
| Фланец за кабелни входи за WST, 6xM16, 3xM20, 1xM25                                        | WSTFAOC1      |
| предварително подготвени кабелни входи с тапи, размер на плочата Ш=300 Д=62 mm, RAL7035    |               |
| Шаси за монтаж на модулна апаратура, 3 р. x 14M, отваряемо                                 | WSTIE6040P    |
| за WST табла с размери В=600 Ш=400 mm                                                      |               |
| Гумиран кабелен вход 28mm, 6 входа, (10 броя)                                              | WSTCEG2806    |
| 3x 3,4mm, 3x 5-9mm                                                                         |               |
| Гумиран кабелен вход 40mm, 10 входа, (10 броя)                                             | WSTCEG4010    |
| 3x 5-14mm, 7x 2-7mm                                                                        |               |
| Гумиран кабелен вход 50mm, 8 входа, (5 броя)                                               | WSTCEG5008    |
| 2x 3-7mm, 1x 12-21mm, 1x 7-15mm, 4x 4-10mm                                                 |               |
| Гумиран кабелен вход 50mm, 7 входа, (5 броя)                                               | WSTCEG5007    |
| 7x 6-13mm                                                                                  |               |
| Стандартна ключалка 5 mm за табла WST                                                      | WSTL3532      |
| подходящ ключ = DV903532                                                                   |               |
| Секретна ключалка за табла WSA, с 1 ключ EK 333                                            | WSSL3844-A    |
| Секретна ключалка за табла WST, с ключ 5333                                                | DV905333      |
| с два ключа тип 5333                                                                       |               |