

Данни за артикула: YRTS8024--

Socket with spring terminals, 5mm, logical, 24VAC/DC

S-Relay, for RT relays, 300VAC, 8A, with integrated LED and FD



Schrack-Info

- Relay socket with LED indicator
- Spring terminals - terminal cross-sections from 0.5 mm² to 2.5 mm²
- DIN rail mounted plug-in socket with logical arrangement
- Easy installation and clear circuit labeling


Технически данни

Мин. околна температура (°C)	-40
Макс. околна температура (°C)	85
Стандарт на продукта	EN 61984
Начин на свързване	Spring terminals
Initial breakdown voltage	
Between poles	2000 V/min
Between contact and coil	4000 V/min
Номинално напрежение	300VAC
Номинален ток (A)	8
Оперативно напрежение DC	6-24 V
Нето тегло (kg)	0,03

Технически данни - продължение

Едножичен проводник (mm ²)	0.5 - 2.5
Многожичен проводник (mm ²)	0.5 - 2.5
Многожичен проводник с накрайник (mm ²)	0.5 - 2.5

Circuit diagram

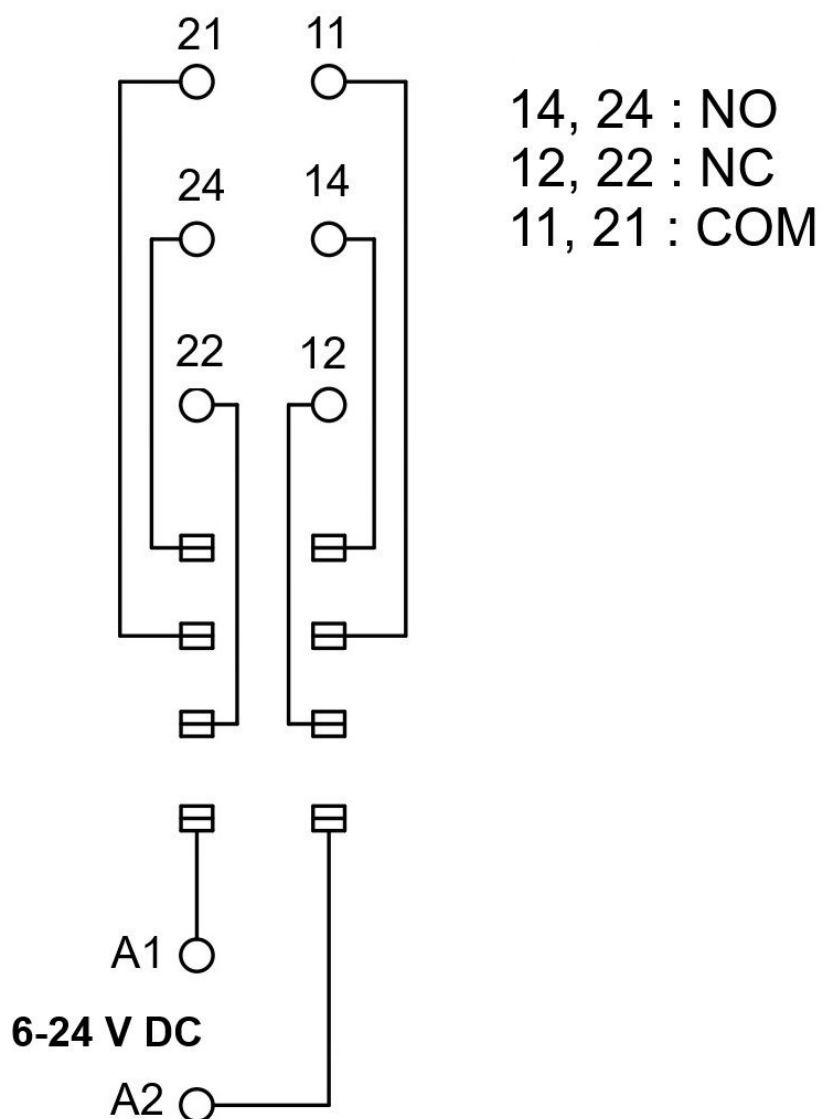

Dimensions

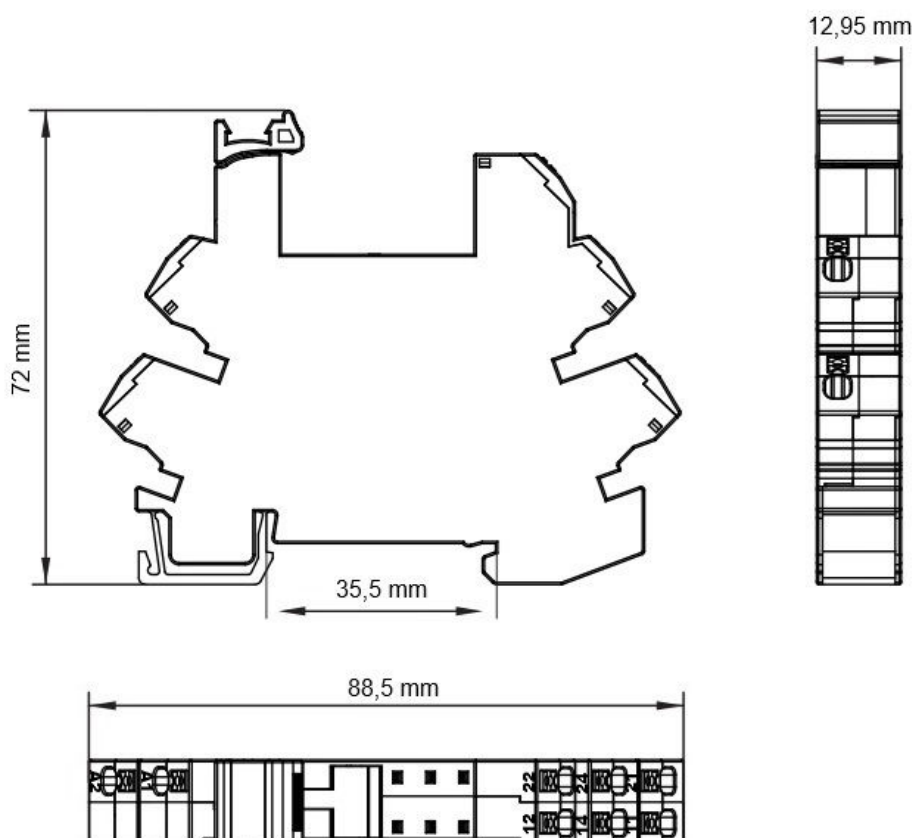


Таблица с артикули

Описание	Артикулен No.
Socket with spring terminals, 5mm, logical, 24VAC/DC	YRTS8024
S-Relay, for RT relays, 300VAC, 8A, with integrated LED and FD	
Акcesoари	
Jumper bar, for connection of up to 10 YRTS8-sockets	YRTS8000
S-Relais, Serie RT	