


Данни за артикула: EV103003--

Механизъм димер 400W/VA - RL - 2

проводника

Cover EV102013--

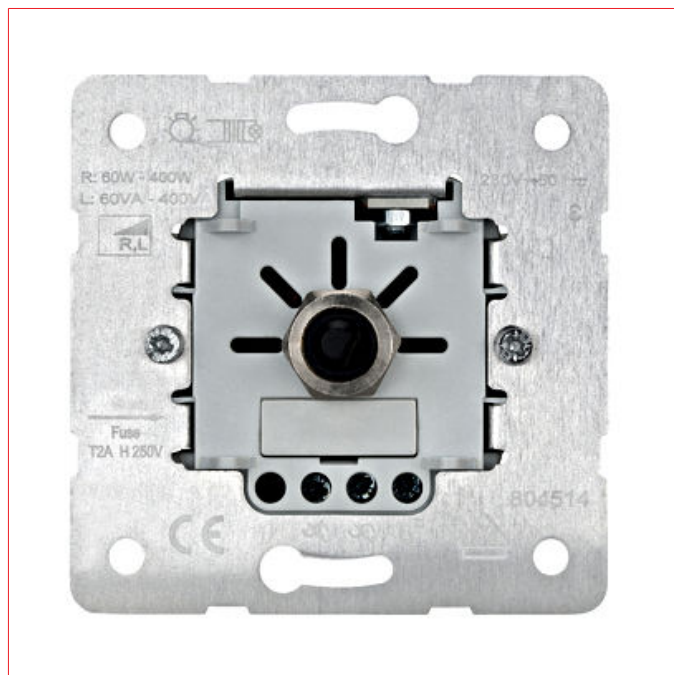

Schrack-Info

Phase angle rotary dimmer with on/off button for resistive or inductive loads. The built-in potentiometer can be used to set a basic brightness, i.e. a constant brightness value which is the same each time the unit is switched on. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Технически данни

Серия	VISIO 50
Дизайн	CLASSIC
Тип продукт	Dimmer
Тип димер	Trailing edge dimmer
Load type	Ohmic Inductive
Dimmable illuminants	Low voltage halogen lamp with conventional transformer Incandescent lamp High voltage halogen lamp

Технически данни - продължение


Power range	60-400 W/VA
Оперативно напрежение AC (V)	230
Монтаж	Screws and claws
Тип на закрепване	Flush-mounted
Работна температура	0°C to +35°C
Safety function	Short-circuit protection Reversible electronic overload protection
Степен на защита - IP	IP20
Начин на свързване	винтова хомутна клема
Свързващи клеми	в съответствие с EN 60669-1
Допустими кабели	Flexible with end splice Flexible Твърд
Допустимо сечение (mm ²)	1,5 und 2,5
Материал	ABS Galvanized steel
Околна среда	Несъдържащ халогени
Устойчивост	RoHS
маркировка от изпитание	VDE
Размери (mm)	70x70x40
Дълбочина на монтаж (mm)	35

Dimmleistung

							
Min.	60 W	60 W	60 VA	-	-	-	-
Max.	400 W	400 W	400 VA	-	-	-	-

- 1 ... Glühlampe
 2 ... Halogenlampe
 3 ... konventioneller Transformator
 4 ... elektronischer Transformator
 5 ... dimmbare Energiesparlampe CFL
 6 ... dimmbare 230V LED-Lampe
 7 ... dimmbare 12V LED-Lampe

Анschlussplan

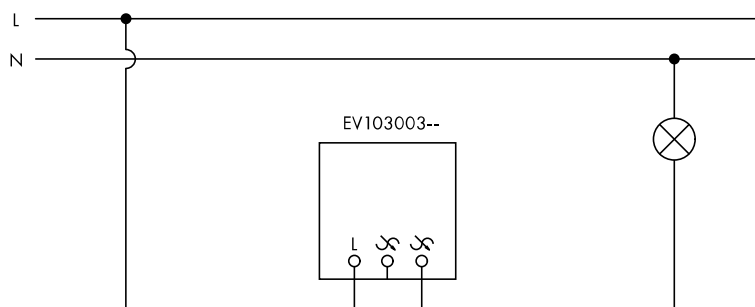

Abmessungen (mm)

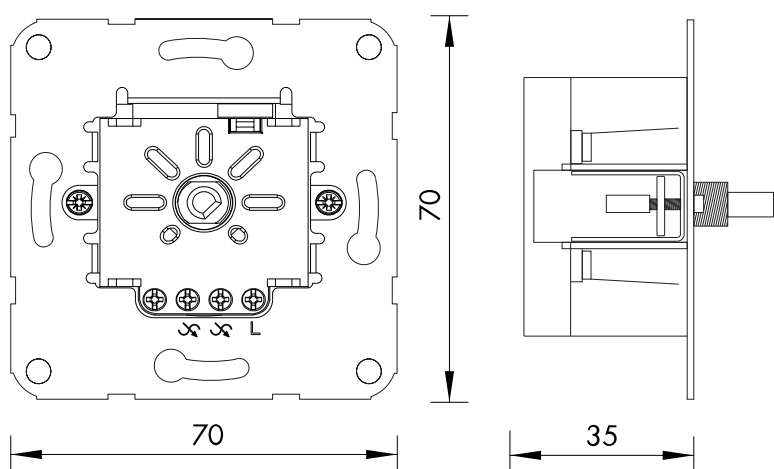


Таблица с артикули

Описание	Артикулен No.
Механизъм димер 400W/VA - RL - 2 проводника	EV103003
Cover EV102013--	
Аксессуары	
Капачка за димер (+ бутон), бяла	EV102013
Капачка за димер (+ бутон), антрацит	EV112013
Капачка за димер, сива	EV122013