

Данни за артикула: NLILDS023S

Авариен осв. 1x3W ERT-LED 3h 230VAC Self C.spot surface m.


White, surface ceiling mounting, Hi-bay radial beam for space illumination of high halls




Технически данни

Нето височина (mm)	36,00
Нето диаметър (mm)	99,00
Нето тегло (kg)	0,25
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	саморегулиращ се
Версия	пластмасов осветител
Дизайн	IL
Безхалогенен	Housing made of halogen-free plastic
Цвят	Бяло
Време на съхранение (h)	3
Illuminant	ERT-LED (3W)
Lumen	240
MPP диапазон на напрежение (V)	230V AC 50Hz ±20%
Батерия (V/Ah)	4,8/2,0 NiMh
Степен на защита - IP	IP40
Монтаж	surface mounting ceiling
Мин. околна температура (°C)	-5
Макс. околна температура (°C)	30
AA Class E 8101	AA4


Dimensions NLILD... (mm)

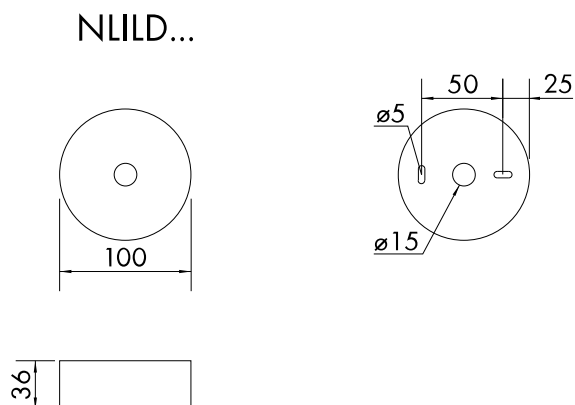

Dimensions accessoires NLILIP65 (mm)

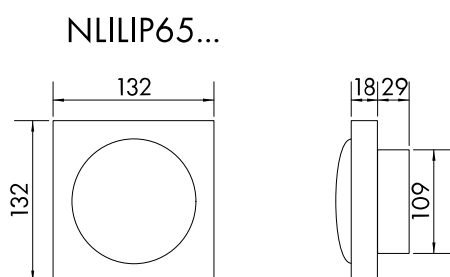

Dimensions accessoires Zinc die-dast housing NLEA.. (mm)

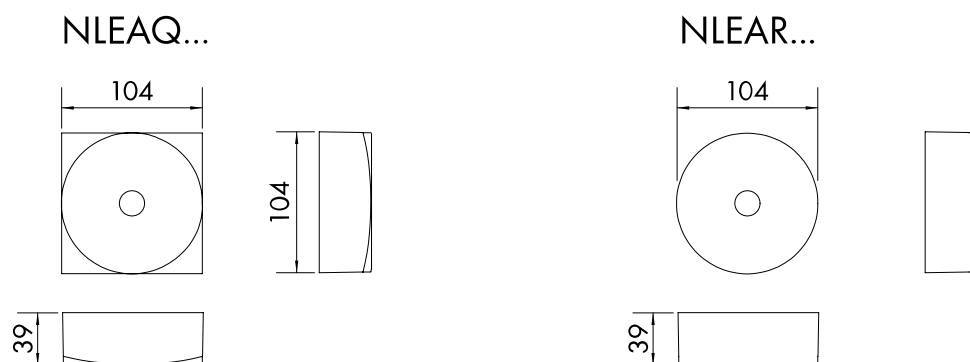

Dimensions recessed frame NLILDE (mm)



Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	2,22	5,34	5,38	5,41	2,30
2,50	2,50	6,28	6,33	6,38	2,59
3,00	2,80	6,81	6,87	6,92	2,80
3,50	2,94	7,28	7,35	7,42	3,04
4,00	3,13	7,72	7,79	7,86	3,13
5,00	3,38	8,64	8,58	8,52	3,38
6,00	3,60	9,34	9,26	9,18	3,46
7,00	3,72	9,86	9,74	9,64	3,56
8,00	3,56	10,30	10,16	10,02	3,40
9,00	3,27	10,53	10,38	10,20	3,27
10,00	3,04	10,6	10,44	10,28	2,88
12,00	2,13	10,11	9,93	9,75	1,89

Таблица с артикули

Описание	Артикулен No.
Аварийен осв. 1x3W ERT-LED 3h 230VAC Self C.spot surface m. White, surface ceiling mounting, Hi-bay radial beam for space illumination of high halls	NLILDS023S
Акcesoари	
Square plug over housing B1 for emergency luminaires NLILD..	NLILB1
Square plug over housing B2 for emergency luminaires NLILD..	NLILB2
Покривна капачка бяло кръг Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAR
Покривна капачка антрацит кръг Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEARAZ
Покривна капачка бяло кв. Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQ
Покривна капачка антрацит кв. Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Spacer plate for NLILD.. for cable entry at the side	NLILDAPA
Ball Protection gascet for IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
IP65 housing for IL ceiling mounted luminaires, бял Suitable for ceiling mounted emergency luminaires NLILD.., zinc die-cast, IK10, including spacer plate	NLILIP65W
Акумулатор 4,8V 2,0Ah за осветители LED с LPU модул LPU or LEM module	NLAKKU4820