


Данни за артикула: HSELS129CR

FO Сплайс кутия за DIN-релса, 12 влакна, SC, 9/125µm OS2

RAL7035, incl. Pigtails, incl. couplers, CLASSIC



Технически данни

Нето ширина (mm)	126,00
Нето височина (mm)	35,20
Дълбочина (mm)	155,65
Нето тегло (kg)	0,59
Оптика	9/125 OS2 Singlemode / G.652.D
Цвят	RAL 7035 (Light grey)
Insertion loss typical (dB)	≤0,2
Return loss typical (dB)	≥50
Мин. околна температура (°C)	-10
Макс. околна температура (°C)	70
Оптичен брояч	12
куплунг	SC

Чертеж: FO Сплайс кутия за DIN-релса, 12 влакна, SC, 9/125µm OS2

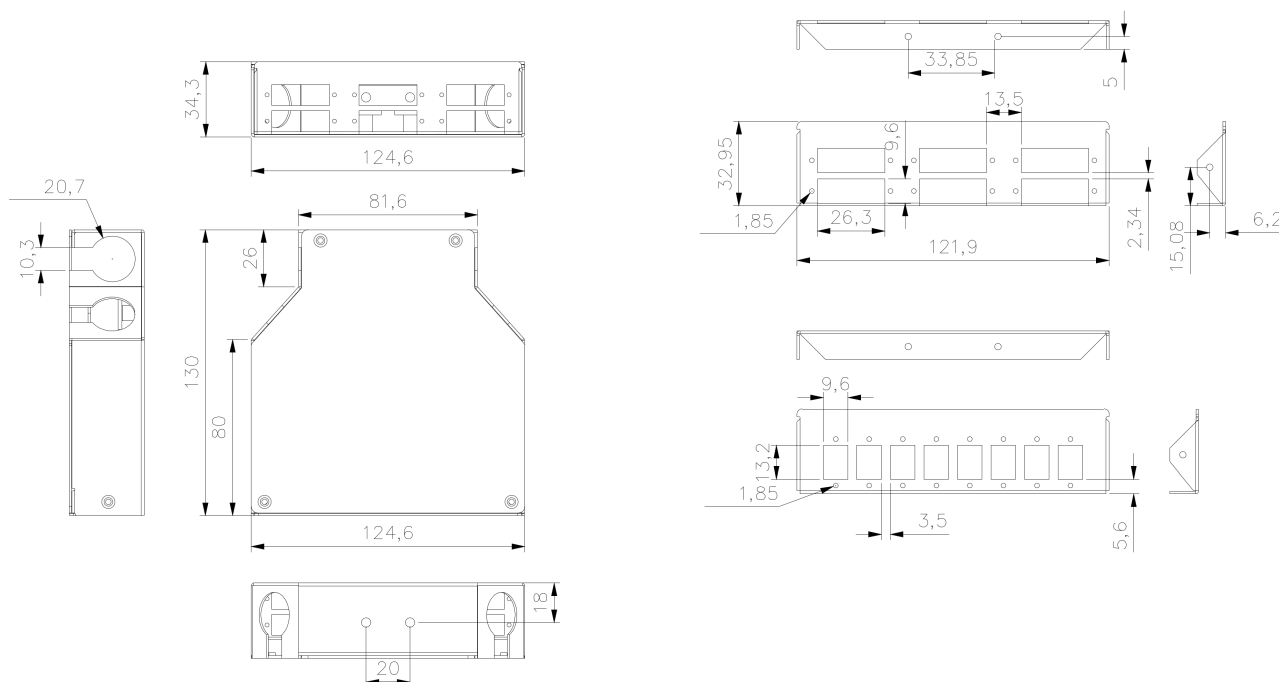
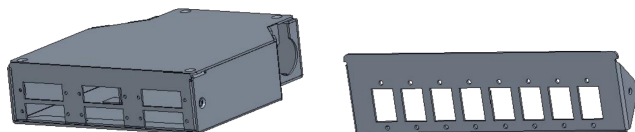


Таблица с артикули

Описание	Артикулен No.
FO Сплайс кутия за DIN-релса, 12 влакна, SC, 9/125µm OS2 RAL7035, incl. Pigtails, incl. couplers, CLASSIC	HSELS129CR
Акcesoари	
FO свиваем сплайс протектор 60mm	HELSP00011
FO свиваем сплайс протектор, 40mm	HELSP00010
Fiber Optics Cleaning Tool for SC, ST, FC and E2000 Suitable for UPC and APC connectors. More than 1,000 cleaning cycles.	HSELSZT002
FO Power meter with integrated laser light source (VFL) and RJ45-copper cable test. ATTENTION: This is a Laser Class 2 product. Do not stare into the beam. Always keep the cover on the VFL port when not in use. It is recommended to use laser safety glasses when working with fiber optic systems.	HSELSZT003
FO Пач кабел Duplex, SC/SC, 9/125µm OS2, жълт, 2.0m LSOH, yellow	HLP29CC02F

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
FO Пач кабел Duplex, SC/SC, 9/125µm OS2, жълт, 5.0m LSOH, yellow	HLP29CC05F
FO Пач кабел Duplex, LC/SC, 9/125µm OS2, жълт, 2.0m LSOH, yellow	HLP29LC02F
FO Пач кабел Duplex, LC/SC, 9/125µm OS2, жълт, 5.0m LSOH, yellow	HLP29LC05F
FO Пач кабел Duplex, ST/SC, 9/125µm OS2, жълт, 2.0m LSOH, yellow	HLP29TC02F
FO Пач кабел Duplex, ST/SC, 9/125µm OS2, жълт, 5.0m LSOH, yellow	HLP29TC05F
FO Пач кабел Duplex, SC/FC, 9/125µm OS2, жълт, 2.0m LSOH, yellow	HLP29CF02F
FO Пач кабел Duplex, SC/FC, 9/125µm OS2, жълт, 5.0m LSOH, yellow	HLP29CF05F