






Данни за артикула: HSELS245CG

FO Пач панел, 24 влакна, SC, 50/125µm OM2, плъзгащ, 19", 1U

acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing,
PREMIUM

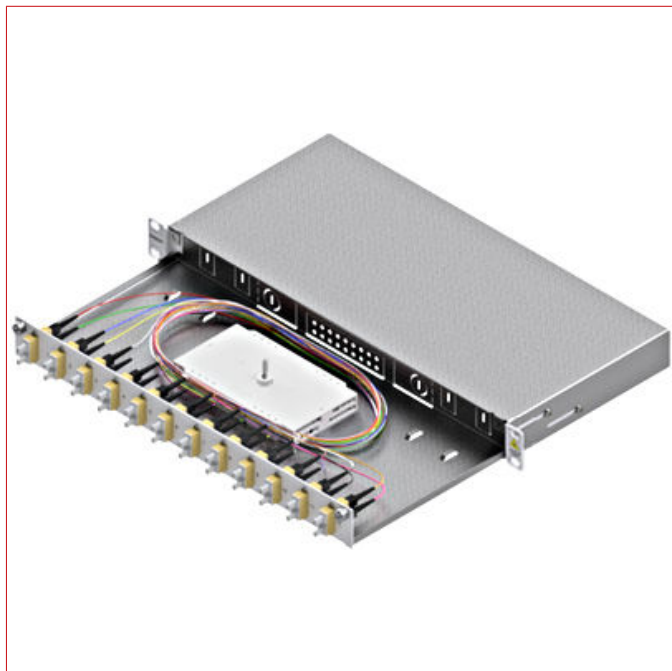

SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1 U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open

Standards:

50173-1, EN 61300-3-6, EN 61300-3-85

Технически данни

Нето широчина (mm)	482,50
Нето височина (mm)	43,60
Дълбочина (mm)	211,50
Нето тегло (kg)	2,70
Оптика	50/125 OM2 Multimode
Цвят	RAL 7035 (Light grey)
Мин. околна температура (°C)	-10
Макс. околна температура (°C)	70
Оптичен брояч	24
куплунг	SC

Dimension drawing

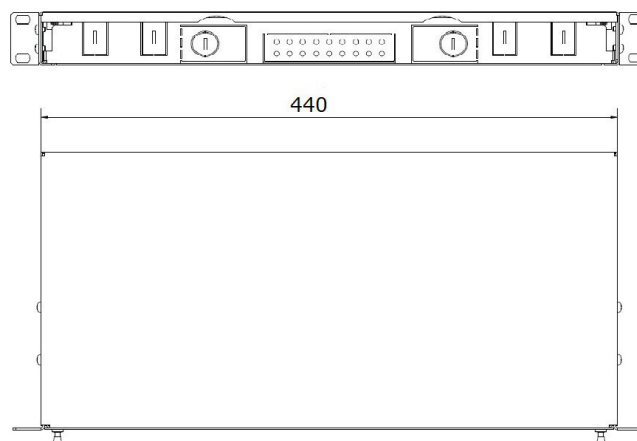
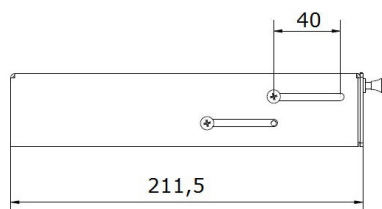
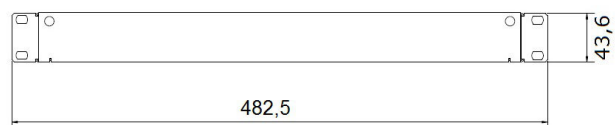


Таблица с артикули

Описание	Артикулен No.
FO Пач панел, 24 влакна, SC, 50/125µm OM2, плъзгащ, 19", 1U acc. to IEC 61753-1, RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM	HSELS245CG
Акcesoари	
FO свиваем сплайс протектор 60mm	HELSP00011
FO свиваем сплайс протектор, 40mm	HELSP00010