

Данни за артикула: MAIA3200--

Multi-tone siren, 8 tones, 230-240VAC

Base required, only mountable as top modul, Версия Multi Tone, Конструкция модул, Control Dip switch, MPP диапазон на напрежение AC 230-240V



Технически данни

Серия	MA 230V
Версия	Multi Tone
MPP диапазон на напрежение (V)	AC 230-240
Конструкция	модул
Control	Dip switch
Степен на защита - IP	IP66
Диаметър, mm (mm)	70
Входове	depends on base
Необходими аксесоари	MAIB0001 --;
Аксесоари	MAIB0002--;MAIR0001 --
Lens	Polycarbonate, ribbed inside
Монтаж	any
ресурс	100000
Температурен обхват - работен (°C)	-30 to +60
Номинален ток (A)	0,04

Технически данни - продължение

Volume (dB)	100
Sound frequency (Hz)	500-2700
Maximum modules used	5
Инсталационен диаметър (mm)	70
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]

Sound Chart

Dip Switch	Tone Stage	Ton Type	Frequency	Pictogramm	Repeat Rate	Application	dB
	Tone 01	Continuous	2700Hz	—			100
	Tone 02	Continuous	1350Hz	—			100
	Ton 03	Intermittent	2700Hz	— — —	250ms on, 250ms off		100
	Ton 04	Intermittent	1350Hz	— — —	250ms on, 250ms off		100
	Ton 05	Sweeping	1200 - 500Hz		1Hz	Evacuation Germany DIN 33404-3	98
	Ton 06	Sweeping	500 - 1200Hz		rising in 3s, 0.5s off	Netherlands NEN 2575:2000	98
	Ton 07	Alternating	800 - 1000Hz		2Hz		94
	Ton 08	Pulsating	500 - 1500Hz		10Hz		94

Dimension

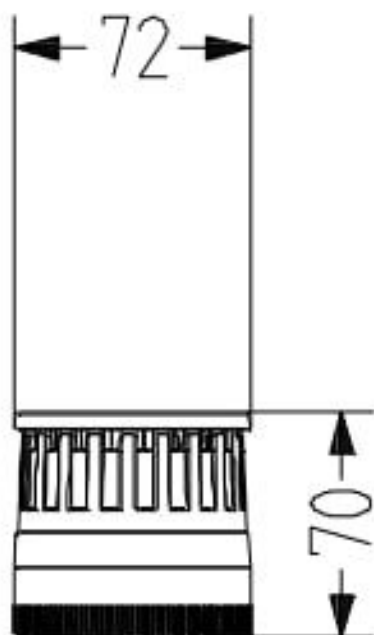


Таблица с артикули

Описание	Артикулен No.
Multi-tone siren, 8 tones, 230-240VAC	
Base required, only mountable as top modul, Версия Multi Tone, Конструкция модул, Control Dip switch, MPP диапазон на напрежение AC 230-240V	MAIA3200
Необходими аксесоари	
Standard Base for Signal Towers modular, Black	
1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия аксесоари, Конструкция празна основа, Terminal type Cage clamp	MAIB0001
Аксесоари	
Vertical Base for Signal Towers modular, Black	
1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия аксесоари, Конструкция празна основа, Terminal type Cage clamp	MAIB0002
Tube base for Signal Towers, Alu-tube with plastic foot, 100mm	
1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия аксесоари, Конструкция празна основа, Terminal type Cage clamp	MAIR0001