

Данни за артикула: WKA204015G

Метално табло, със стъклена врата, IP66, 200x400x155mm

Sheet steel, hinged, with bottom profiles, quick release by quarter turn, without mounting plate



SCHRACK-Info

- BUS-Enclosures in four different sizes, each available with or without glazed door
- Material: 1.2mm sheet steel (Finish: Textured powder coating)
- Body: Folded and seam-welded with four mounting holes in the rear panel and floor profiles for mounting DIN-rails or mounting plates
- Gasket: Extruded one-piece polyurethane gasket
- Earthing: Earthing stud M6x16mm in the cover. Contains M6 nuts and earth washers
- Supply includes: Base, hinged cover, cover screws and floor profiles
- Optional accessories: Mounting plates WKAMPxxxx, DIN-rails WKADRxxxx and wall-mounting brackets WSAWB004
- Protection class: I
- Degree of protection: IP66
- Impact resistance: IK08, IK06 with glazed door
- Color: RAL 7035 (Light grey)




Технически данни

Технически данни - продължение

Нето широчина (mm)	400,00
Нето височина (mm)	200,00
Дълбочина (mm)	155,00
Нето тегло (kg)	5,00
Мин. околна температура (°C)	-10
Макс. околна температура (°C)	50
Степен на защита - IP	IP66
Клас на защита	I
Impact Resistance	IK06
Цвят	RAL 7035 (Light grey)
Разсейвана мощност (W)	-49,00

Technical Details - BUS-Enclosures with Glazed Door WKA

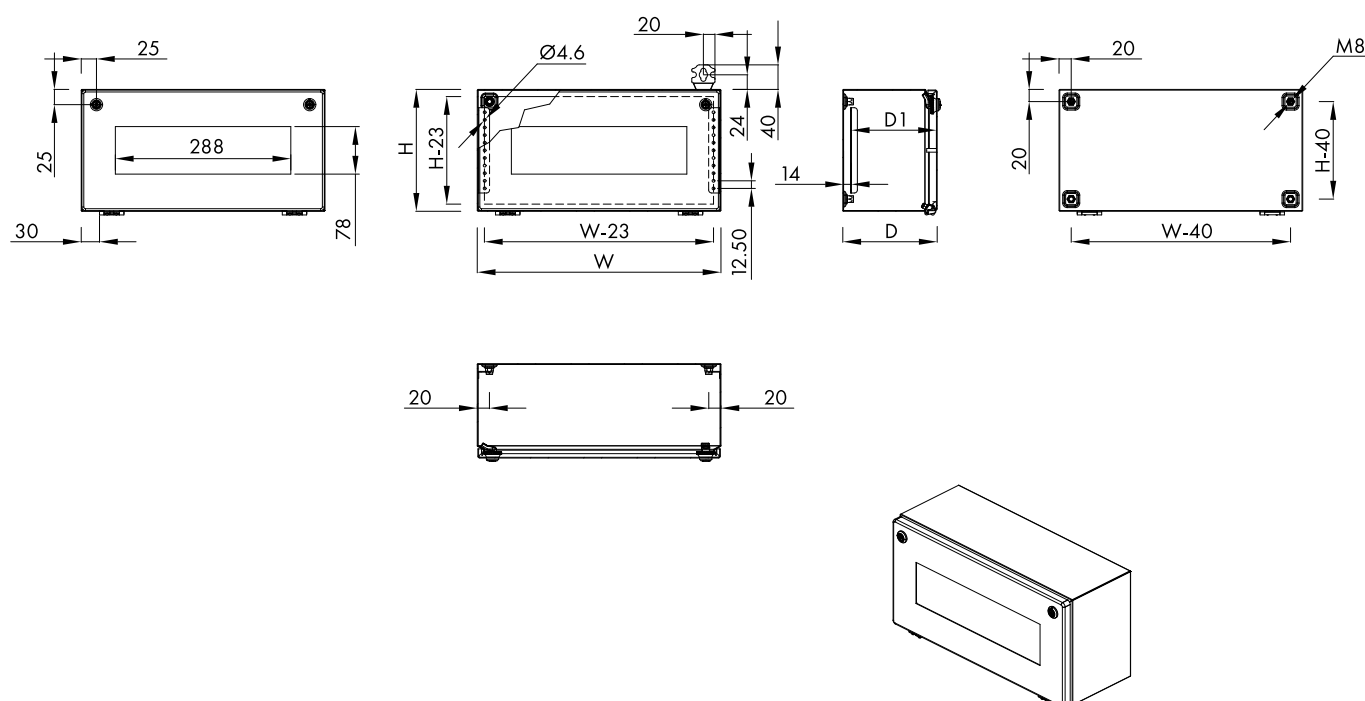

[mm]

Таблични файлове: Метално табло, със стъклена врата, IP66, 200x400x155mm

Gehäuse (mm)					Gewicht (kg)	P _V (W)*	Montageplatten (mm)			DIN-Schienen (mm)		
Artikelnummer	H	B	T	Sichtfenster			Artikelnummer	Höhe	Breite	Artikelnummer	Höhe	Länge
WKA204015G	200	400	155	✓	5,00	-49	WKAMP2040	175	385	WKADR400	15	385
WKA304015G	300	400	155	✓	6,60	-65	WKAMP3040	275	385	WKADR400	15	385
WKA306015G	300	600	155	✓	9,12	-90	WKAMP3060	275	585	WKADR600	15	585
WKA308015G	300	800	155	✓	11,90	-114	WKAMP3080	275	785	WKADR800	15	785

* Max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandanbau und einem $\Delta T = 35K$.

Таблица с артикули

Описание	Артикулен No.
Метално табло, със стъклена врата, IP66, 200x400x155mm Sheet steel, hinged, with bottom profiles, quick release by quarter turn, without mounting plate	WKA204015G
Акcesoари	
Скоби за стенен монтаж за табла WSA, 4 броя galvanized, PU=4 pieces	WSAWB004
Монтажна плоча за WKA2040, B=200 Ш=400mm Galvanized sheet steel	WKAMP2040
DIN-релса H=15mm за метално табло WKA с широчина 400mm 1PU=5pieces, suitable for Terminal boxes WKA154012-, WKA204008-, WKA204012-, WKA304012-, WKA404012- and BUS- WKADR400 enclosures WKA204015B, WKA204015G, WKA304015B, WKA304015G	